

LOCTITE®

maintenance solutions



Visit us on the web
www.loctite.com

All trademarks in this catalog, except where noted, are the property of or used under license by Henkel Loctite Corporation, U.S.A.

Krytox and Teflon are registered trademarks of E.I. DuPont de Nemours Co., Inc.
NSF is a registered trademark of NSF International.
CSA is a registered trademark of CSA International.
UL is a registered trademark of Underwriter's Laboratories, Inc.
Copyright 2003. Henkel Loctite Corporation. All rights reserved.

Printed in the U.S.A. 480

LT-3722A

Henkel Loctite Corporation
1001 Trout Brook Crossing
Rocky Hill, Connecticut 06067
1-800-LOCTITE (562-8483)
www.loctite.com

Henkel Loctite Canada Inc.
2225 Meadowpine Blvd.
Mississauga, Ontario L5N 7P2
905-814-6511
800-263-5043 (within Canada)



www.loctite.com

Henkel Technologies

With this comprehensive guide for maintenance engineers in all industries, you can easily select the correct Loctite® product needed to overcome your immediate problems and to prevent future breakdowns and failures.

This guide has been developed to make your product selection quicker, easier, and right the first time. We have even included a “Need It Now” order form so you can quickly select the products you need. However, if more information is needed, all you have to do is visit the Loctite website at www.loctite.com, or call 1-800-LOCTITE (562-8483) for a copy of the latest version of the Loctite Adhesive Sourcebook, our full line catalog.



For additional information visit our Web Site at:

www.loctite.com




4	 Threadlocking Locking of Threaded Fasteners	24	 Lubricants Oils, Greases, and Dry Film
6	 Thread Sealing Sealing of Threaded Components	26	 Lubrication Anti-Seize
8	 Gasketing Sealing of Flanges	28	 Surface Protection and Rust Prevention
10	 Retaining Securing Cylindrical Assemblies	30	 Parts and Surface Cleaning
12	 Metal Rebuilding and Shaft Repair	32	 Hand Cleaners
14	 Wear Prevention and Rebuilding	34	 Bonding
16	 Floor and Concrete Repair	36	 Kits, Specialty, and Emergency Repair Products
18	 Anti-Slip Flooring	38	 Accessories
20	 Grouting	39	 Need It Now! Form
22	 Belt Repair	41	 Product Ordering Information



Threadlocking

Locking of Threaded Fasteners

- Prevents loosening from shock and vibration
- Single part – clean and easy to apply
- Can be used on various sizes of fasteners – reduces inventory costs
- Seals threads
- Stops rust and corrosion

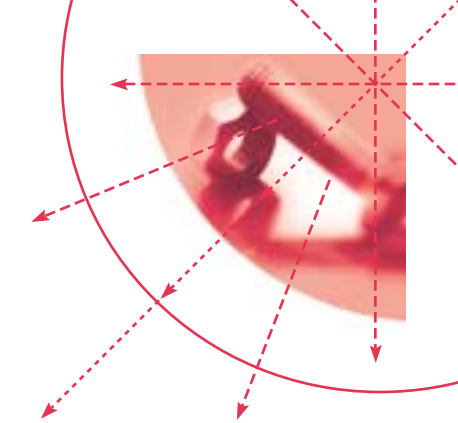


THREADLOCKING

Are the parts already assembled?

Helpful Hints:

- Clean parts with Loctite® ODC-Free Cleaner and Degreaser before applying the adhesive
- If the threadlocker will be applied below 40°F, pre-treat with Loctite® 7649 (Primer N)
- If the parts were in contact with aqueous washing solutions or cutting fluids which leave a protective layer on the surface, wash with hot water before use

Solution

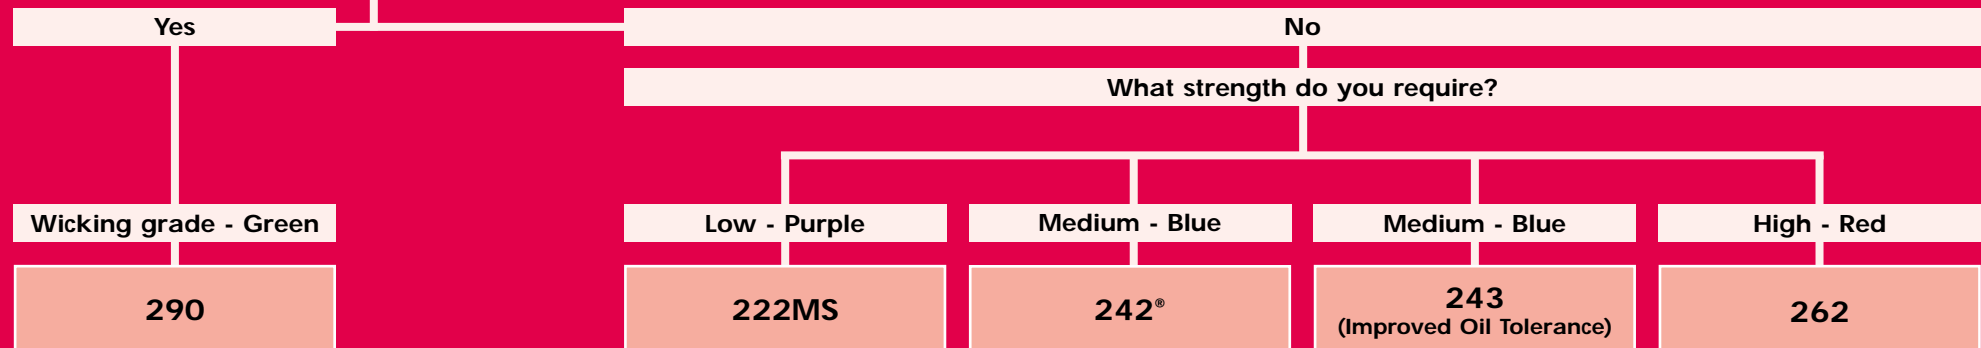

Fastener Size	#2 to 1/2"	Up to 1/4"	1/4" to 3/4"	1/4" to 3/4"	Up to 3/4"
Strength	Medium/High	Low	Medium	Medium	High
Cure Time (Fixture/Full Strength)*	20 min./24 hr.	20 min./24 hr.	10 min./24 hr.	10 min./24 hr.	20 min./24 hr.
Breakaway/Prevail Torque (lb. in.)	85/250	53/30	110/43	180/62	189/275
Temperature Resistance for Continuous Service	300°F (150°C)	300°F (150°C)	300°F (150°C)	300°F (150°C)	300°F (150°C)
Available Sizes	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml

* Typical value @ 70°F (22°C)

Additional Products

Name	Strength	Breakaway/Prevail Torque (lb./in.)	Features
220	Low	85/170	Wicking
272	High	200/220	High Temp up to 1 1/2"
277	High	275/275	Fasteners up to 1 1/2"
2440	Medium	215/53	Primerless
2760	High	325/320	Primerless



Loctite® 290 Wicking Threadlocker

Recommended for locking pre-assembled fasteners, i.e. instrumentation screws, electrical connectors, and set screws. Also seals porosities in welds and metal parts. Mil Spec (S-46163A) Type III, Grade R. NSF®/ANSI 61.



Loctite® 222MS Low Strength Threadlocker

Recommended for low-strength threadlocking of adjusting screws, countersunk head screws, and set screws; on collars, pulleys, tool holders, and controllers. Also for low strength metals such as aluminum or brass which could break during disassembly. Mil-Spec (S-46163A) Type II, Grade M.



Loctite® 242° Removable Threadlocker

Effective on all types of metal threaded fasteners. Prevents loosening on vibrating parts such as pumps, motor mounting bolts, gear boxes, or presses. Recommended for use where disassembly with hand tools is required for servicing. NSF®/ANSI 61. ABS Approved.



Loctite® 243 Threadlocker

Effective on all types of metal threaded fasteners. Prevents loosening on vibrating parts such as pumps, motor mounting bolts, gear boxes, or presses. Recommended for use where disassembly with hand tools is required for servicing and where parts are contaminated with oil. NSF®/ANSI 61. Agriculture Canada Approved.



Loctite® 262 High Strength Threadlocker

Red 262 is a high strength product that is applied to fasteners up to 3/4" (20mm) in size before assembly. Localized heating and hand tools are required to separate parts. Solvents will not weaken the adhesive bond. Mil-Specs (S-46163A) Type II, Grade O. ABS Approved. Agriculture Canada Approved.

Use Loctite® 7649 Primer N to:

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and deep threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.

Primer is optional with:

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel

Primer is required with:


Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium, others.





Thread Sealing

- Replaces tapes and pastes
- Liquids ensure complete contact between threads for a 100% seal
- Liquids will not creep, shrink, shred, or block systems (including filters)
- Disassembly can be achieved easily with basic hand tools

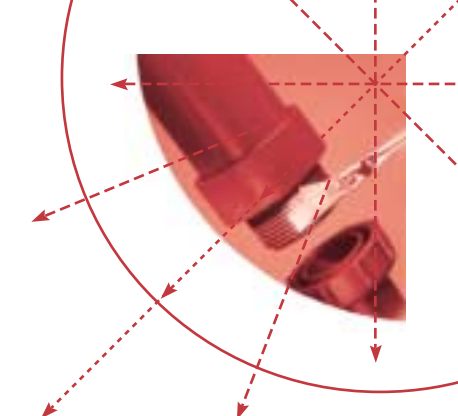


THREAD SEALING

Are the parts metal or plastic?

Helpful Hints:

- If the sealant (545, 565 or 567) will be applied below 40°F, pre-treat with Loctite® 7649 Primer N
- All parts must be clean & dry before sealing - use Loctite® ODC-Free Cleaner and Degreaser

Solution

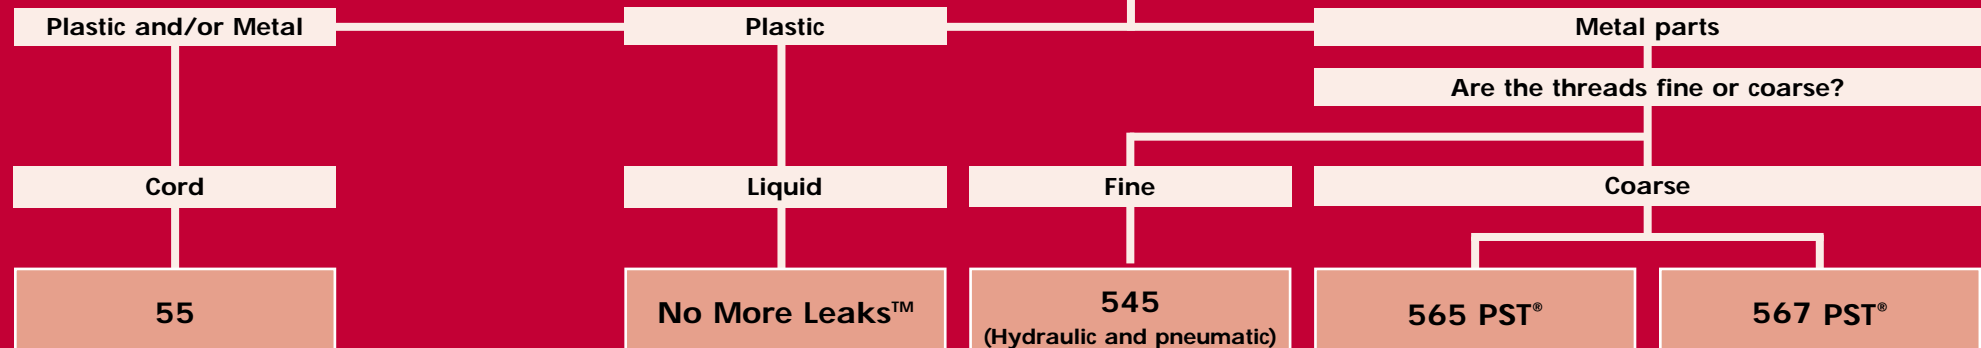

Description	Cord	White Paste	Purple Liquid	White Paste	White Paste
Maximum Thread Size	4"	3"	Up to 2"	Up to 2"	3"
Temperature Resistance	300°F (150°C)	300°F (150°C)	300°F (150°C)	300°F (150°C)	400°F (204°C)
Maximum Pressure Resistance (psi) /Cure Time	10,000 psi /instant	10,000 psi /N.A.	10,000 psi /24 hrs	10,000 psi /72 hrs	10,000 psi /72 hrs
Substrate to be Sealed	Metal, plastic or both	Plastic	Metal	Metal	Stainless Steel, Aluminum
Instant Low Pressure Seal	Yes	Yes	No	Yes	No
Available Sizes	5,700 inches	2 oz, 7 oz, 1 pint	10 ml, 50 ml, 250 ml	6ml, 50 ml, 250 ml, 300ml	6ml, 50 ml, 250 ml, 16oz can

Additional Products

Name	Type
Thread Sealant 564	Instant Seal
H.V.A.C. Pipe Joint Compound	Seals oil, refrigerants, butane, propane, and more
Pipe Joint Compound	High Temp, Non-hardening
Thread Sealant with Teflon®	Non-hardening



Loctite® 55 Pipe Sealing Cord

Can be safely applied on metal and plastics threaded fittings. Potable water: ANSI/NSF® Standard 61. UL Listed and Certified to CSA® International.



Loctite® No More Leaks™

Recommended for use on threaded plastic fittings carrying hot or cold water, i.e. industrial and agricultural plastic water pipe systems, or drainage systems.



Loctite® 545 Thread Sealant

Recommended for fine threaded fittings as used in hydraulic and pneumatic installations and small fittings in general. ABS Approved. Agriculture Canada Approved.



Loctite® 565 PST® Thread Sealant

A general-purpose instant sealer for tapered and straight/tapered fittings. Controlled strength for ease of disassembly. CSA® 3319-81 and 3319-01. UL® MH007(N). NSF®/ANSI 61. ULC-Canada Approved. Agriculture Canada Approved.



Loctite® 567 PST® Thread Sealant

Withstands temperatures to 400°F with excellent solvent resistance. Locks and seals tapered pipe threads and fittings, including high pressure applications. Disassembles with hand tools. ABS Approved.

Use Loctite® 7649 Primer N to:

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and deep threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.

Primer is optional with:

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel

Primer is required with:

Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium, others.






Gasketing


Sealing of Flanges

- No shimming effect – controlled tolerances, no need for re-torquing
- Fill all voids – reduce the need for a fine surface finish of flanges
- Parts can be disassembled easily even after extended service
- Resists high pressure when fully cured

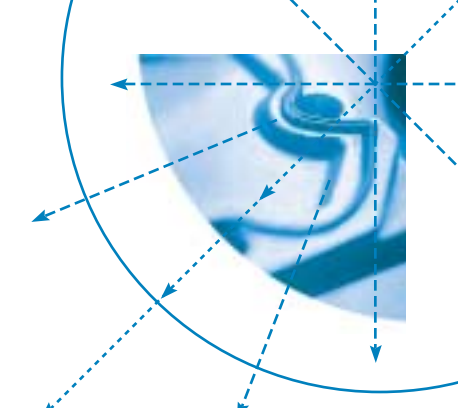

GASKETING

Does the existing gasket need to be used as a shim?

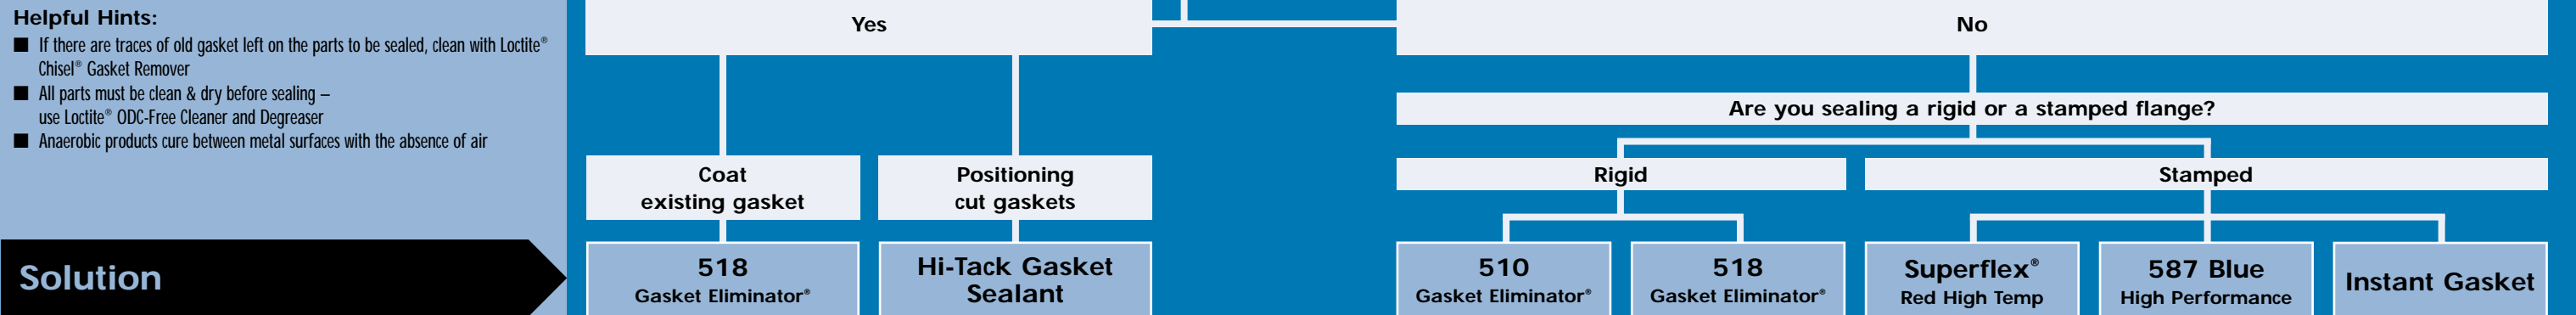

Gasket Type	518 Gasket Eliminator®	Hi-Tack Gasket Sealant	510 Gasket Eliminator®	518 Gasket Eliminator®	Superflex® Red High Temp	587 Blue High Performance	Instant Gasket
Gasket Type	Formed-in-place	Use with cut gasket	Formed-in-place	Formed-in-place	Formed-in-place	Formed-in-place	Formed-in-place
Gap Fill	N.A.	N.A.	0.010" (0.25mm)	0.010" (0.25mm)	0.250" (6.35mm)	0.250" (6.35mm)	0.250" (6.35mm)
Cure Method	Anaerobic	Solvent evaporation	Anaerobic	Anaerobic	Moisture (RTV)	Moisture (RTV)	Moisture (RTV)
Tack-Free Time	N.A.	N.A.	N.A.	N.A.	< 60 min.	50 min.	5 min.
Temperature Resistance (Continuous/Intermittent)	300°F (150°C)/N.A.	500°F (260°C)/N.A.	400°F (204°C)/N.A.	300°F (150°C)/N.A.	500°F (260°C)/600°F (316°C)	400°F (204°C)/500°F (260°C)	450°F (232°C)/550°F (288°C)
Instant Seal	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
Oil Resistance	Excellent	Good	Excellent	Excellent	Excellent	Excellent	Excellent
Water/Glycol Resistance	Moderate	N.A.	Excellent	Excellent	Moderate	Excellent	Excellent
Available Sizes	6 ml, 50 ml tube	0.25 pt, 1 pt, 9 oz. aerosol	50 ml tube	6 ml, 50 ml tube	80 ml, 300 ml, 7.25 oz. can, 12 oz. tube	70 ml, 300 ml cart., 8.75 oz. can	4 oz. can, 5 oz. cart., 7 oz. can


Additional Products	
Name	
Gasket Sealant #1	
Gasket Sealant #2	
Aviation Gasket Sealant	
High Performance Silicones (598 Black, 5920 Copper, 5699 Grey)	
Superflex® RTV Silicones (Black, Clear, White, Blue)	



Loctite® 518 Gasket Eliminator® Flange Sealant
 Recommended for coating and re-using gaskets to improve sealing. Low strength for easy disassembly. Spray Loctite® Primer N on both flange surfaces and both sides of the gasket. NSF®/ANSI 61 Certified. Agriculture Canada Approved.



Loctite® Hi-Tack Gasket Sealant
 Adhesive/sealant for holding pre-cut gaskets in place during assembly. Can be applied to all rubber, cork, paper and metal gaskets.



Loctite® 510 Gasket Eliminator® Flange Sealant
 Recommended for use on rigid iron and steel flanges. Spray Loctite® Primer N on only one surface. UL® Listed.



Loctite 518 Gasket Eliminator® Flange Sealant
 Recommended for use on rigid iron, steel, and aluminum flanges. Spray Loctite® Primer N on only one surface. NSF®/ANSI 61 Certified. Agriculture Canada Approved.



Loctite® Superflex® Red High Temp Silicone Sealant
 Recommended for sealing all types of flanges including stamped sheet metal where high temperature resistance is needed.



Loctite® 587 Blue High Performance Silicone Gasket Maker
 Recommended for sealing all types of flanges including stamped sheet metal. Designed for superior bonding properties to oil contaminated metals. ABS Approved.




Loctite® Instant Gasket
 Makes high-performance, leakproof gaskets in one minute. Equipment can be returned to service immediately. Blowout resistant. Outperforms precut gaskets.



Retaining

Securing Cylindrical Assemblies

- Bond non-threaded cylindrical metal assemblies
- High and moderate strength products – can carry high loads and eliminate fretting
- Fill all voids – prevent corrosion
- Reduce the need for close tolerances
- 100% contact – load and stress is distributed evenly over the joint

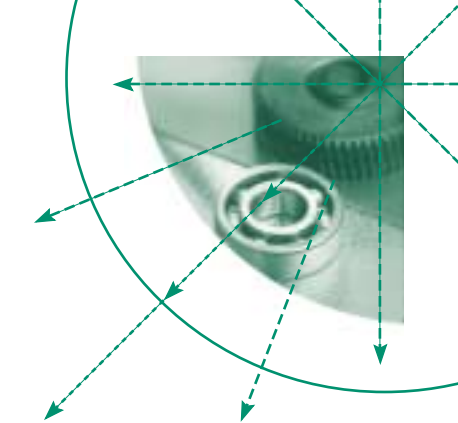

RETAINING

Is the assembly badly worn?

Helpful Hints:

- If the retainer will be applied below 40°F (5 °C), pre-treat with Loctite® 7649 Primer N
- All parts must be clean & dry before sealing – use Loctite® ODC-Free Cleaner and Degreaser
- If the parts have been in contact with washing or cutting fluids containing nitrites, wash with hot water

Yes - Gaps up to 0.020" (0.5mm)

No - Gaps to 0.015" (0.4mm)

Will the parts be dismantled later for maintenance?
i.e. bearings

Yes

No

Temperatures above 300°F (150 °C)?

Yes to 400°F (200°C)

No

Oil Contamination or other?

No

Yes

Solution

660
Quick Metal®

609

620

680

603

Strength Required	High	Moderate	High	High	High
Shear Strength	3,300 psi	2,300 psi	3,800 psi	4,000 psi	3,770 psi
Diametrical Clearance	Up to .020" (0.5 mm)	Up to .005" (0.1 mm)	Up to .015" (0.4 mm)	Up to .015" (0.4 mm)	Up to .005" (0.1 mm)
Temperature Resistance	300 °F (150°C)	300°F (150°C)	400°F (204°C)*	300°F (150°C)	300°F (150°C)
Available Sizes	6ml,50 ml	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml	10 ml, 50 ml, 250 ml

* Requires heat cure to achieve temperature resistance

Use Loctite® 7649 Primer N to:

1. Activate inactive surfaces.
2. Speed cure times for faster return to service.
3. Speed curing through larger gaps and deep threads.
4. Substantially speed cure times on cold parts.
5. Act as a cleaning agent.

Primer is optional with:

Active surfaces: Brass, copper, bronze, iron, soft steel, nickel

Primer is required with:

Inactive surfaces: Aluminum, stainless steel, magnesium, zinc, black oxide, cadmium, titanium, others.



Loctite® 660 Quick Metal® Retaining Compound

Used for repairing worn coaxial parts without remachining; enables re-use of worn bearing seats, keys, splines, tapers, or for retaining shims. Agriculture Canada Approved.



Loctite® 609 General Purpose Retaining Compound

Recommended for parts that will need subsequent dismantling, i.e. retention of bearings onto shafts and into housings. Mil-Spec (R-46082B) Type I.



Loctite® 620 High Temperature Retaining Compound

Recommended for high temperature retaining of parts with a clearance or interference fit, i.e. retaining bushes, bearings, seals, fans, and liners. Requires heat cure to achieve temperature resistance. ABS Approved.



Loctite® 680 High Strength Retaining Compound

Gives best resistance to dynamic, axial, and radial loads. Recommended for retaining shafts, gears, pulleys, and similar cylindrical parts. NSF®/ANSI 61 Approved. ABS Approved.




Loctite® 603 Retaining Compound Oil Tolerant

For retaining close-fitting cylindrical parts, up to .005" (0.1 mm) gap, and for use on cylindrical fitting parts where thorough degreasing is not possible. Applications include retaining roller bearings or oil impregnated bushings into housings.




Metal Rebuilding and Shaft Repair

- High compressive strength
- Choice of mild steel aluminum or non-metallic fillers
- Can be machined, drilled, or tapped after cure
- Excellent resistance to aggressive chemicals

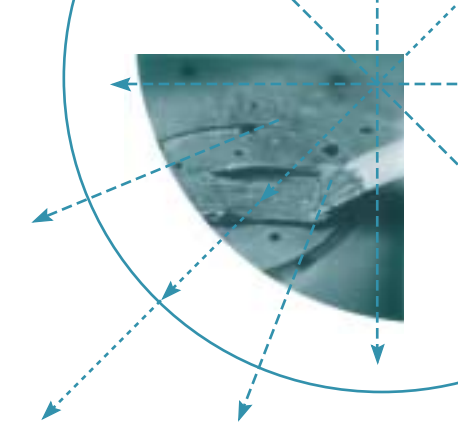

METAL REBUILDING AND SHAFT REPAIR

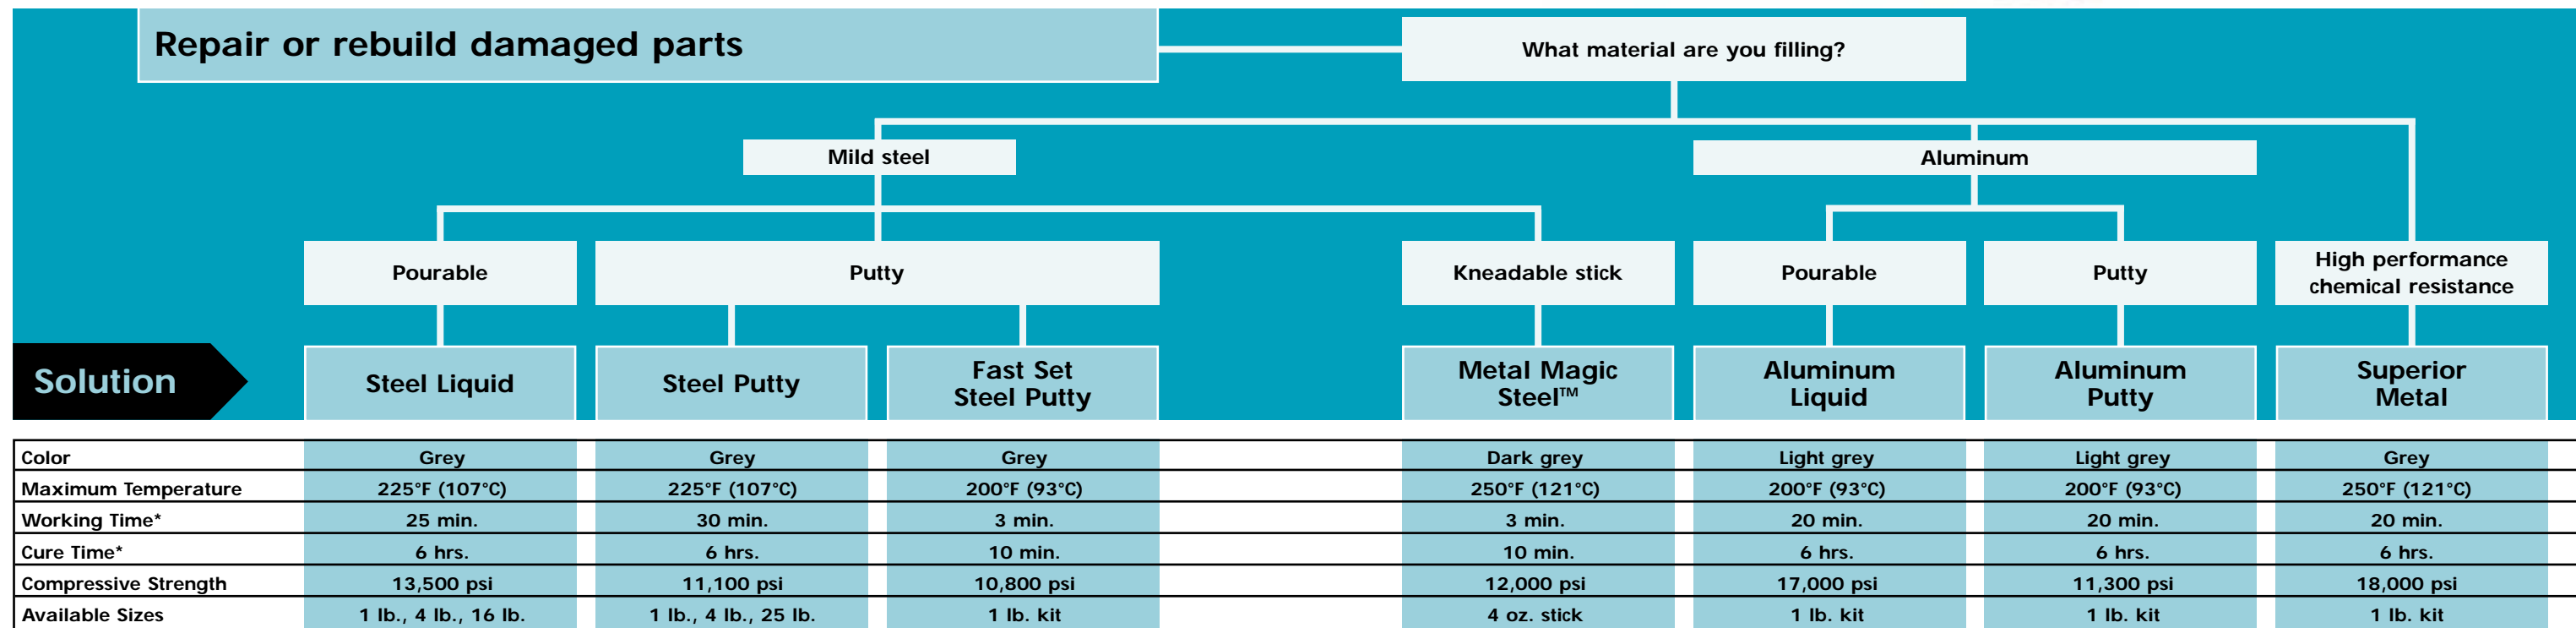

* at 77°F (25°C)

Additional Products	
Name	
Fixmaster®	Stainless Steel Putty
Fixmaster®	Fast Set Steel Epoxy
Fixmaster®	Wet Surface Repair Putty
Fixmaster®	Underwater Repair Epoxy



Loctite® Fixmaster® Steel Liquid
High steel content. Pourable liquid filler used for making fixtures and molding. ABS Approved.



Loctite® Fixmaster® Steel Putty
High steel content putty. Recommended for repairing and rebuilding worn steel components, such as bearing and fan housings. ABS Approved.



Loctite® Fixmaster® Fast Set Steel Putty
A fast curing version of steel putty. Recommended for repairing pipes and other emergency repairs. ABS Approved.



Loctite® Fixmaster® Metal Magic Steel™
Kneadable two-part paste. Working time is 3 minutes - sets in 10 minutes. Adheres to damp surfaces. Can be drilled, filed, and painted. Ideal for emergency sealing of leaking tanks and pipes. Smooths welds, repairs small cracks in castings, and fills oversized bolt holes.



Loctite® Fixmaster® Aluminum Liquid
Fluid, self-leveling aluminum liquid. Can be poured into molds and cavities. Recommended for casting aluminum replacement parts and for making molds. ABS Approved.



Loctite® Fixmaster® Aluminum Putty
General purpose, aluminum putty for repair of all aluminum alloy components. ABS Approved.




Loctite® Fixmaster® Superior Metal Putty
Formulated with fine alloy particles with high compressive strength and chemical resistance. Recommended for use on all metals. Outstanding compressive strength, chemical resistance, non-rusting.



Wear Prevention and Rebuilding


- Restores worn surfaces
- Provides wear and impact resistant coatings
- Use on new parts to extend life
- Available in both trowelable and brushable forms

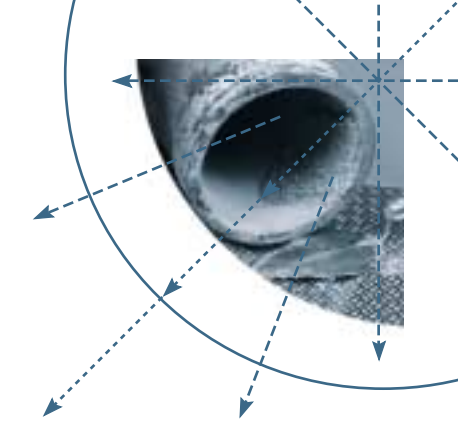

WEAR PREVENTION AND REBUILDING

Repair, rebuild, or protect wearing surfaces

- Helpful Hints:**
- Clean Surfaces with Loctite® ODC-Free Cleaner and Degreaser
 - Use expanded metal to fill large voids
 - Roughen surfaces to ensure adhesion

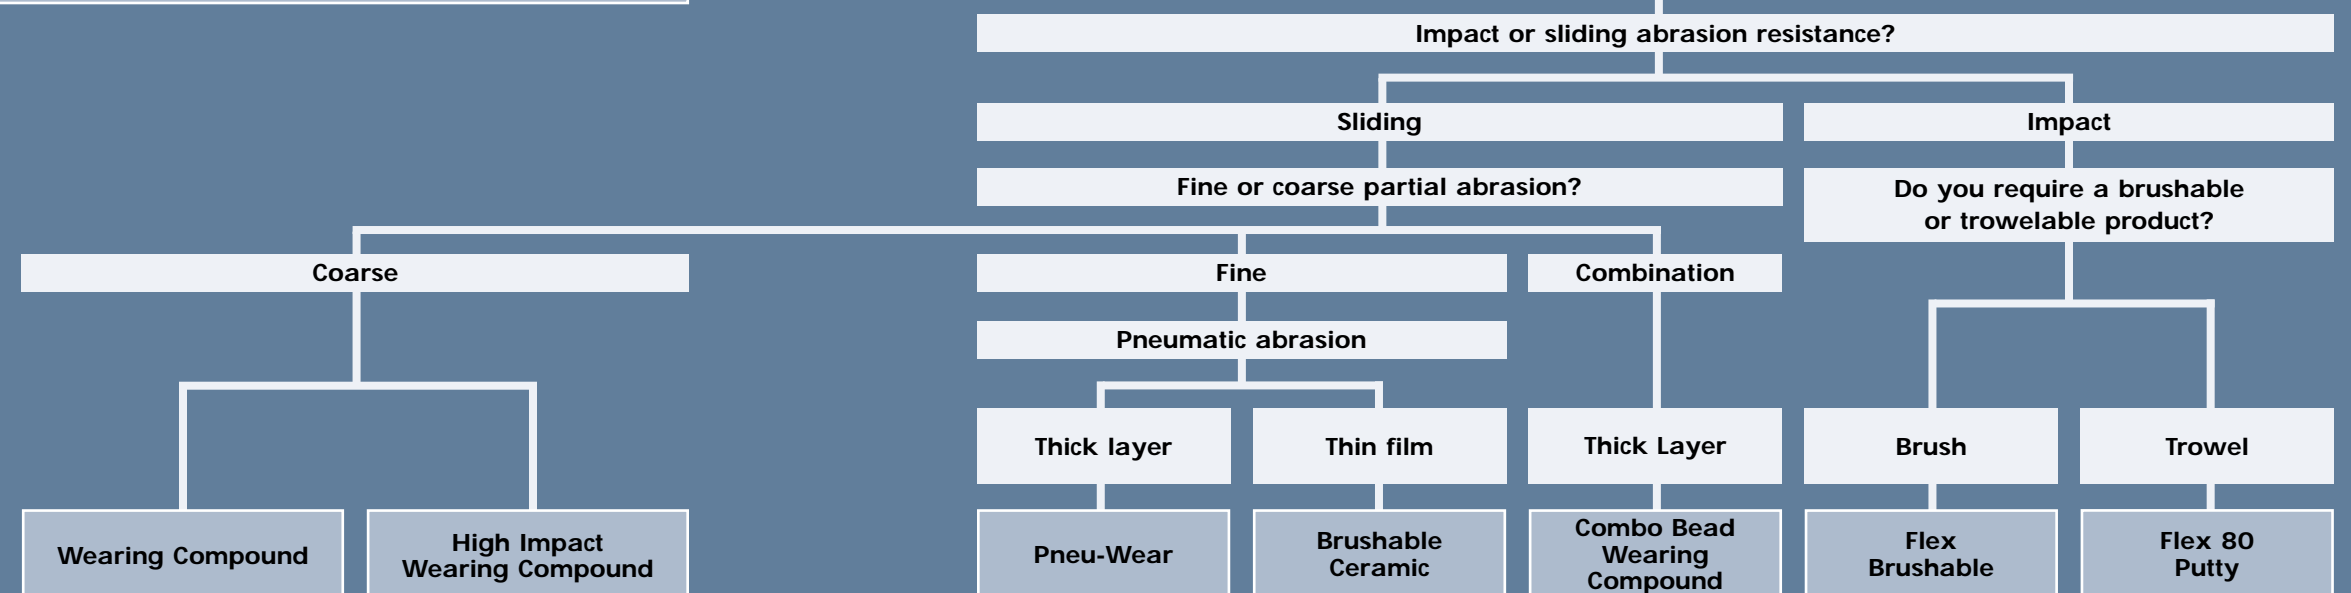

Solution

	Wearing Compound	High Impact Wearing Compound	Pneu-Wear	Brushable Ceramic	Combo Bead Wearing Compound	Flex Brushable	Flex 80 Putty
Color	Grey	Grey	Grey	Grey or White	Grey	Black	Black
Maximum Temperature	250°F (121°C)	250°F (121°C)	250°F (121°C)	200°F (93°C)	250°F (121°C)	180°F (82°C)	180°F (82°C)
Working Time*	30 min.	30 min.	30 min.	Grey 30 min., White 15 min.	25 min.	10 min.	10 min.
Cure Time*	7 hrs.	6 hrs.	6 hrs.	Grey 6 hrs., White 5 hrs.	8 hrs.	6 hrs.	8 hrs.
Available Sizes	5 lb., 25 lb. kits	25 lb. kit	3 lb., 5 lb., 25 lb. kit	2 lb., 6 lb. kits	6 lb. kit	1 lb. kit	1 lb. kit, 6 lb. kit

* At 77°F (25°C)

Additional Products	
Name	Type
Nordbak® High Temp Wearing Compound	450°F (232°C)
Nordbak® High Temp Pneu Wear	450°F (232°C)
Nordbak® Ultra High Temp Wearing Compound	550°F (288°C)
Nordbak® Ultra High Temp Pneu Wear	550°F (288°C)
Nordbak® Fast Cure Wearing Compound	3 hr. cure
Nordbak® Fast Cure Pneu Wear	3 hr. cure
Nordbak® High Temp Brushable Ceramic	550°F (288°C)
Nordbak® Chemical Resistant Coating	150°F (66°C)
Nordbak® Castable Wearing Compound	Mold wear resistant parts
Nordbak® Ceramic Tile Adhesive	200°F (93°C)
Fixmaster® Flex Metal Primer	Promotes the adhesion of Loctite® Flex Urethanes to metal



Loctite® Nordbak® Wearing Compound
Trowelable compound that protects against sliding abrasion. Use to rebuild and protect chutes, pump housings, elbows, cyclones, and material handling equipment.



Loctite® Nordbak® High Impact Wearing Compound
Rubber modified compound absorbs impacts. Recommended where both sliding abrasion and impacts are present.



Loctite® Nordbak® Pneu-Wear
Resists fine particle abrasion caused in pipe elbows of pneumatic conveyor systems. ABS Approved.



Loctite® Nordbak® Brushable Ceramic
Smooth, wear resistant, low friction coating to combat turbulence and cavitation on components such as pump housings and impellers. ABS Approved.




Loctite® Nordbak® Combo Bead Wearing Compound
Combines the abrasion resistance properties of both large and small ceramic beads and silicone carbide in a trowelable, non-sagging epoxy paste.



Loctite® Fixmaster® Flex Brushable
This two-part urethane brushes on to form abrasion and impact-resistant linings. ABS Approved. Use Flex accessories to properly etch, clean, and prime surfaces.




Loctite® Fixmaster® Flex 80 Putty
A trowelable, two-part urethane for rebuilding and repairing rubber parts and linings, providing impact, abrasion, and corrosion resistant protection. ABS Approved. Use Flex accessories to properly etch, clean, and prime surfaces.



Floor and Concrete Repair

- Chemical and corrosion resistance
- High impact resistance
- Bonds to concrete, wood, metals, brick, and other common building materials

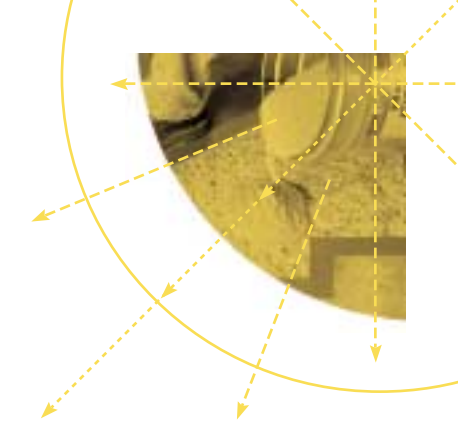

FLOOR AND CONCRETE REPAIR

Floor Repairs

Helpful Hints:

- Vary consistency of Magna-Crete® for vertical applications
- Use Magna-Crete® for cold storage applications
- No concrete bonding agents required
- Use a backer rod when filling deep expansion joints

Solution

Extreme Chemical Resistance

General Floor Repair

Filling Expansion Joints

Do you require a higher strength or a faster curing floor repair?

High Strength

Fast Cure

High Performance Quartz

Floor Fill

Magna-Crete®
(Low temp. applications/
high temp. resistance)

Flex 80 Liquid

Color	Grey	Grey	Grey	Black
Maximum Temperature	150°F (66°C)	225°F (107°C)	2,000°F (1,093°C)	180°F (82°C)
Compressive Strength	12,000 psi	15,000 psi	13,000 psi	N.A.
Working Time	45 min.	40-60 min.	15 min.	20 min.
Functional Cure	24 hrs.	24 hrs.	1 hr.	8 hrs.
Chemical Resistance	Excellent	Good	Fair	Fair
Available Sizes	42 lb. kit	10 lb. Kit, 40 lb. Kit	1 gallon kit, 5 gallon kit	1 lb. kit, 6 lb. kit

Additional Products		
Name	Available Colors	Sizes
Urethane Sealant	Limestone and Black	10.2 oz. Cartridge
Chemical Resistant Coating	Grey	12 lb. kit
Fixmaster® Magna-Crete® Activator	-	10 lb.



Loctite® Fixmaster® High Performance Quartz

A highly-filled, quartz epoxy system designed to protect old or new concrete from chemical attack. Provides a surface resistant to concentrated acids, alkalis, and solvents. Areas damaged by chemical attack may be resurfaced with HPO. Easily applied, trowelable system that should be applied at a minimum 1/4" build to provide maximum chemical resistance.



Loctite® Fixmaster® Floor Fill

A three-component, self-leveling, non-shrinking epoxy floor repair system. 100% solids, epoxy-based system for repairing holes in floors, spalled areas, ramps, stairs, cracks in floors, and for use in grouting applications. Stronger than concrete, it bonds to almost any clean substrate and provides corrosion and chemical resistance.



Loctite® Fixmaster® Magna-Crete®

This two-component magnesium phosphate cement sets rapidly and has a very high early strength. Ideal for road and aircraft runway repairs, which can typically be driven over after 45 minutes. It bonds to new and old concrete as well as most construction materials including wood, glass, and steel. No water additive, so it can be applied at temperatures as low as -15°F.



Loctite® Fixmaster® Flex 80 Liquid


A castable two-part urethane for making molds, fixtures, expansion joints, and non-scratching holding fixtures.





Anti-Slip Flooring

- Chemical resistance
- Designed to increase the Coefficient of Friction (COF)
- Exceeds OSHA COF recommendations

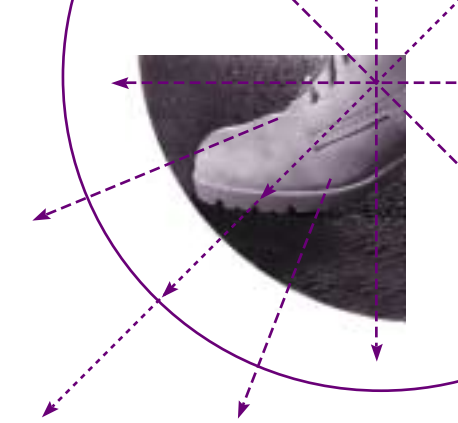

ANTI-SLIP FLOORING

Anti-Slip Coatings

Helpful Hints:

- Most formulas can be rolled, sprayed, or trowelled
- Finished flooring easily cleaned with a biodegradable cleaner degreaser
- Remove any oil, grease, dirt, or water prior to application
- Test for the presence of water to determine if floor can be coated

Solution

Skid proofing for safety purposes

Do you have pedestrian or vehicular traffic?

Vehicular

Heavy Rolling Equipment Traffic

Big Foot™
Vehicular Grade

Most Aggressive Profile and Odor Sensitive Areas

Big Foot™
Zero V.O.C.

Pedestrian

Recreation or Barefoot Traffic

Big Foot™
Low Profile

Heavy Pedestrian or Light Rolling Traffic

Big Foot™
Heavy Duty Pedestrian

Asphalt or Flexible Applications

Big Foot™
Acrylic Pedestrian Grade


Color	Black, Grey, and Tile Red	Black and Grey	Black and Grey	Black and Grey	Black and Grey
COF (Dry/Wet)	1.05/1.05	1.10/1.00	0.78/0.86	1.17/1.00	1.30/0.90
Coverage per Gallon (ft ² /meter ²)	40 ft ² (3.7m ²)	35 ft ² (3.3m ²)	90 ft ² (8.4m ²)	50 ft ² (4.7m ²)	70 ft ² (6.5m ²)
Working Time	4 hrs.	1 hr.	1 hr.	N.A.	N.A.
Drying Time (Light Pedestrian Traffic/Heavy Pedestrian Traffic)	12/72 hrs.	24/72 hrs.	24/72 hrs.	12/72 hrs.	4/24 hrs.
Available Sizes	1 gallon, 5 gallon kits	1 gallon, 5 gallon kits	1 gallon kit	1 gallon, 5 gallon kits	1 gallon kit

Additional Products	
Name	Used on or with
Big Foot™ Metal Primer	Metal
Big Foot™ Acrylic Primer	Acrylic Pedestrian Grade
Big Foot™ Primer/Sealer	Porous Surfaces (ex. Concrete, wood, tile)



Loctite® Big Foot™ Vehicular Grade

Withstands even the heaviest rolling equipment traffic. Resists liquids as harsh as jet fuels and hydraulic fluids. Superior adhesion forms a solid bond to metal, concrete, and wood.



Loctite® Big Foot™ Zero V.O.C.

This 100% reactive, solvent-free epoxy has the most aggressive profile in the Big Foot™ line. Use in odor-sensitive areas such as wineries, food processing plants, hospitals, or confined spaces.



Loctite® Big Foot™ Low Profile Pedestrian Grade

A two-component, water-borne epoxy for recreation and barefoot traffic areas.



Loctite® Big Foot™ Heavy Duty Pedestrian Grade

For areas with heavy pedestrian or light rolling traffic. Ideal for ramps, walkways, locker rooms, stairs, and assembly areas.




Loctite® Big Foot™ Acrylic Pedestrian Grade

A single-component, elastomeric, anti-slip floor and deck coating for optimum adhesion to asphalt and flexible applications. Best for outdoor applications.



Grouting

- Chemical and corrosion resistance
- Self-leveling
- Stronger than concrete
- Bonds to concrete, wood, metals, brick, and other common building materials

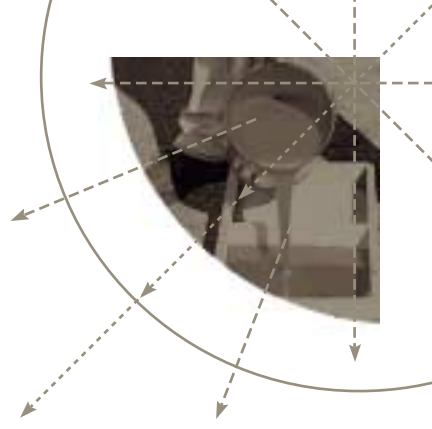

GROUTING

Grouting	Is this a Marine Application?			
	Yes	No		
		Pour depth required?		
		Up to 1"	Up to 6"	Up to 18"
Solution	Marine Chocking	Fast Set Grout	Deep Pour Grout	Super Grout
Color	Green or Orange	Red	Black	Red
Maximum Temperature	250°F (121°C)	200°F (93°C)	225°F (107°C)	225°F (107°C)
Compressive Strength	22,000 psi	14,500 psi	14,500 psi	12,900 psi
Working Time*	10-15 min.	10 min.	30 min.	285 min.
Functional Cure	24 hrs.	12hrs.	24 hrs.	24 hrs.
Available Sizes	2 gallon kit	2 gallon kit	5 gallon kit	5 gallon kit

Helpful Hints:

- Use Fast Set Grout to set anchor bolts
- Replace traditional steel chocks with Marine Chocking for mounting equipment in the marine industry

* Typical value @ 77°F (25°C)



Loctite® Fixmaster® Marine Chocking

Self-leveling, fast-curing, non-shrinking grout. Outstanding chemical and vibration resistance and compressive strength to withstand maximum loads. Approved by the American Bureau of Shipping.



Loctite® Fixmaster® Fast Set Grout

Self-leveling, non-shrinking grout for installing machinery and setting anchor bolts. Cures quickly. Can be poured up to 1" thick. Compression strength and chemical resistance are superior to concrete. Forms strong bonds to old concrete and to itself.



Loctite® Fixmaster® Deep Pour Grout

Aggregate-filled, epoxy system for pours up to 6" deep, including self-leveling applications under rails and sole plates. High strength material bonds to steel, concrete, and itself. Withstands high torque load.




Loctite® Fixmaster® Super Grout

Designed for grouting up to 18" deep, including self-leveling applications under rails and sole plates. Super Grout is a 100% solids epoxy system that is non-shrinking, chemical and corrosion resistant, stronger than concrete, and withstands high torque loading.



Belt Repair

- Repair gouges, cuts, and worn edges on rubber belting
- Non-shrinking and unaffected by oil, grease, and water
- Excellent flexibility and elongation

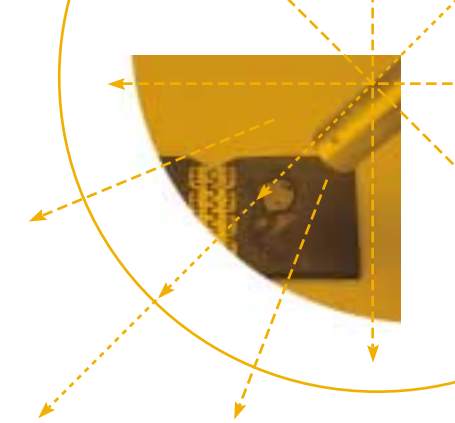


BELT REPAIR

Conveyor Belt Repair

Helpful Hints:

- Rapid Rubber 400 ml cartridges and kit require Rapid Rubber Repair Gun, Part Number 39635
- Instant Belt Repair requires heat
- Instant Belt Repair can be applied at any temperature
- Use the recommended accessory products to ensure maximum adhesion and product reliability

Solution

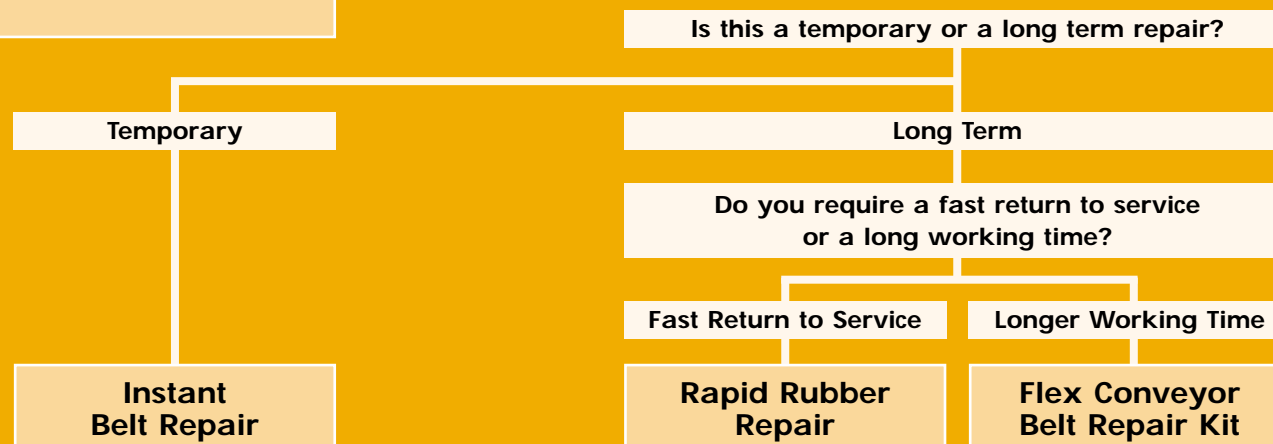

	Instant Belt Repair	Rapid Rubber Repair	Flex Conveyor Belt Repair Kit
Color	Amber	Black	Black
Working Time	N.A.	1 min.	10 min.
Tensile Strength	400 psi	1,300 psi	1,500 psi
Functional Cure	30 min.	2 hrs.	8 hrs.
Available Sizes	1 lb.	400 ml kit, 400 ml cart., 150 ml coaxial cart.	1 lb. kit

Additional Products	
Name	Features
Fixmaster® Flex Rubber Primer	Promotes adhesion to rubber and urethane surfaces
Fixmaster® Etching Agent	Enhances bonds to natural, SBR and Butadiene rubber
Fixmaster® Flex Accelerator	Speeds the cure of Flex Urethanes
Fixmaster® Flex Cleaner	Cleans rubber, urethane or metal



Loctite® Fixmaster® Instant Belt Repair

A single-component, heat-curing material for fast, temporary belt repairs. Requires no priming. Equipment can be operated in 30 minutes.



Loctite® Fixmaster® Rapid Rubber Repair Urethane

Our premium quality, belt repair product is designed to repair conveyor belts and other damaged rubber equipment quickly and easily. Repairs will have the same durability and flexibility as the belt. The 400 ml cartridge requires the use of a Rapid Rubber Repair Gun. Also available in a kit with etching agent and cleaner.



Loctite® Fixmaster® Flex Conveyor Belt Repair Kit


Makes long-lasting belt repairs. Recommended for applications where speed of application is not critical. Cures in 8-12 hours.



Lubricants

Oils, Greases, and Dry Film

- Temperature Resistance
- Thermal Stability
- Penetrate and free corroded assemblies

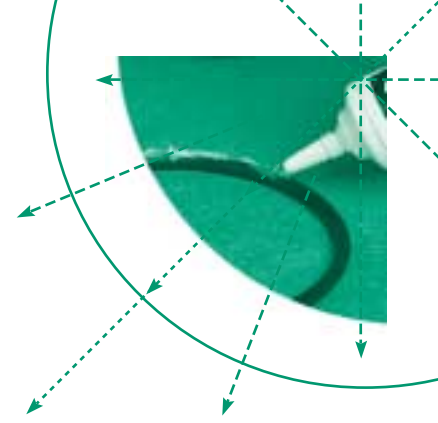

LUBRICANTS

Solution	High Performance Lubrication				Do you need an aerosol, an oil, or a grease?				
	Dry Film Lubricant		Aerosol		Oil		Grease		
							Is there direct contact with severe chemicals? i.e. chlorine, oxygen		
							Yes	No	
	Moly Dry Film	Krytox® RFE Advanced PTFE Dry Lubricant	ViperLube™ High Performance Synthetic Grease	Krytox® Synthetic Lubricating Oil	ViperLube™ Synthetic Lightweight Oil (10w)	ViperLube™ Synthetic Gear Oil (90w)	Krytox® High Performance Lubricant	Krytox® RFE PFPE Lubricant	ViperLube™ High Performance Synthetic Grease
Base Oil	Molybdenum disulfide	PTFE ¹	PAO ¹	PFPE ¹	PAO ¹	PAO ¹	PFPE ¹	PFPE ¹	PAO ¹
Viscosity	-	-	-	-	ISO 32	ISO 220	240 CST ¹	240 CST ¹	240 CST ¹
Temperature Range	-20°F to 750°F (-29°C to 398°C)	-15°F to 500°F (-26°C to 260°C)	-40°F to 500°F* (-40°C to 260°C)	-94°F to 350°F (-70°C to 177°C)	-45°F to 450°F (-42°C to 232°C)	-45°F to 450°F (-42°C to 232°C)	-15°F to 500°F (-26°C to 260°C)	-15°F to 500°F (-26°C to 260°C)	-40°F to 500°F* (-40°C to 260°C)
4 Ball Wear ²	-	-	-	-	0.40	0.60	0.30	0.30	0.42
Food Grade	-	-	NSF® H1	-	NSF® H1	NSF® H1	NSF® H2	NSF® H2	NSF® H1
Available Sizes	16 oz. aerosol, 1.3 lb., 10 lb., 50 lb.	8 oz. aerosol	10.1 oz. aerosol	8 oz. aerosol	1 gallon	1 gallon	2 oz. tube, 16 oz. cart.	2 oz. tube, 16 oz. pail, 16 oz. cart.	1cc tube, 0.42 oz., 3 oz., 400 g can, 14 oz. cart., 30 lb. pail

¹CST @ 40°C

²Four Ball Wear Scar, ASTM D-2266 @ 1 hr., 1200 RPM, 225°F (107°C), 20 Kg load, mm

*400°F - Continuous, 500°F - Intermittent

¹ PTFE=PolyTetraFlouroEthylene

PFPE=PerFlouroPolyEther

PAO=PolyAlphaOlefin

Additional Products	
Name	Feature
Krytox® RFE Cleaner	Removes used or contaminated lubricants
Extreme Pressure Grease	NLGI 1
Gear, Chain and Cable Lubricant	Repels dirt, sand, and dust
Maintain™ Lubricant, Moisture Displacer & Rust Preventer	Close fitting parts
Hydraulic Jack Oil	Hydraulic units
Silicone Lubricant	Food processing
Penetrating Oil	Displaces moisture
Dielectric Grease	Electrical Equipment
Solvo-Rust® Super Penetrating Oil	Close fitting parts
White Lithium Grease	Metal to metal, metal to plastic
Food Grade Grease	Food Processing



Loctite® Moly Dry Film
Solid film lubricant for sliding surfaces and slow-moving parts. Temperature resistant up to 750°F (399°C) as a dry film lubricant, 2,400°F (1315°C) as an anti-seize. Won't squeeze out, burn off, or pick up dirt.



Loctite® Krytox® RFE Advanced PTFE Dry Lubricant
High performance, synthetic lubricant designed to provide long-lasting lubrication for parts that require a dry, thin lubricating film. RFE Advanced PTFE Dry Lubricant provides excellent lubrication properties over a broad temperature range.



Loctite® ViperLube™ High Performance Synthetic Grease
NLGI Grade 2/ Severe Duty GC-LB Grease provides protection against equipment exposed to a wide range of temperatures. Use as a lubricant and protective anti-rust film on bearings and machine parts, or as a release agent on gasket and seals. NSF® H1 rated for incidental food contact.



Loctite® Krytox® RFE Synthetic PFPE Lubricating Oil
A high performance, synthetic oil that provides long-lasting lubrication for all maintenance needs. Compatible with all metals and most plastics, non-flammable, and chemically resistant. Provides protection against friction and wear over a broad temperature range.



Loctite® ViperLube™ High Performance Lightweight Oil
10W Oil reduces varnish and deposits, minimizing the need for replacement parts and maintenance. For use on hydraulic systems, rotary screw compressors, food processing machinery, bearings, chains, and valves. NSF® H1 rated for incidental food contact.



Loctite® ViperLube™ High Performance Synthetic Gear Oil
90W gear oil extends equipment life, reduces oil changes and energy costs. Recommended for use on gear sets, bearings, circulating oil systems, chains, and worn gear units. NSF® H1 rated for incidental food contact.



Loctite® Krytox® RFE PFPE High Performance Lubricant
Synthetic grease provides long-lasting lubrication for all types of moving and/or sliding parts. Compatible with all plastics, elastomers, and metals. Non-flammable, chemically resistant and oxygen compatible.



Loctite® Krytox® RFE PFPE Lubricant
High performance synthetic grease formulated specifically for severe environments. Excellent lubrication properties over a broad temperature range. NLGI Grade 2.




Loctite® ViperLube™ High Performance Synthetic Grease
NLGI Grade 2/ Severe Duty GC-LB Grease provides protection against equipment exposed to a wide range of temperatures. Use as a lubricant and protective anti-rust film on bearings and machine parts, or as a release agent on gasket and seals. NSF® H1 rated for incidental food contact.



Lubrication

Anti-Seize

- Protect against rust, corrosion, seizing, and galling
- Provide lubrication in extreme environments

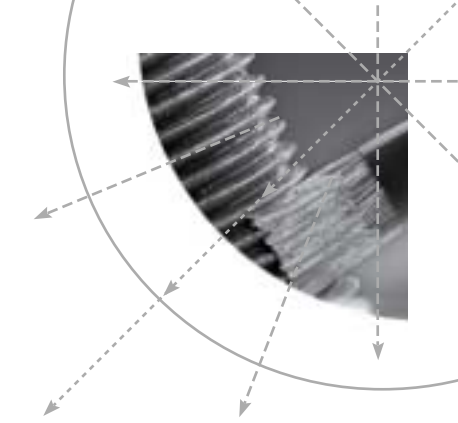


LUBRICATION - ANTI-SEIZE

What type of Anti-Seize do you require?


Solution	General Purpose			Stainless Steel and Titanium Applications	Soft Metal Applications	Incidental Food Contact	Water Resistant
	Up to 1600°F (871° C)	Up to 1800°F (982° C)	Up to 2400°F (1315° C)				
	Silver Grade	C5-A®	Nickel	Heavy Duty	Zinc	Food Grade	Marine Grade
Color	Silver	Copper	Silver	Black	Grey	White	Black
Solid Lubricating Agent	Graphite/Aluminum	Copper/Graphite	Nickel/Graphite	Graphite/Calcium Fluoride	Zinc	White Lubricating Solids	Calcium Sulfonate
Torque Coefficient*	0.18	0.16	0.15	0.16	0.15	0.16	0.18
Temperature Range	-20°F - 1600°F (-29°C - 870°C)	-20°F - 1800°F (-29°C - 982°C)	-20°F - 2400°F (-29°C - 1315°C)	-20°F - 2400°F (-29°C - 1315°C)	-20°F - 750°F (-29°C - 399°C)	-20°F - 750°F (-29°C - 399°C)	-20°F - 2400°F (-29°C - 1315°C)

* K value on steel nuts and bolts

Additional Products		
Name	Max Temp	Features
White Hi-Temp	2000°F (1093°C)	Non-Metallic, High Temp
N-1000	1800°F (892°C)	Power Plant, Copper Based
N-5000	2400°F (1315°C)	Power Plant, Nickel Based
N-5000 High Performance	2400°F (1315°C)	Power Plant, Nickel Based, High Lubricity
N-7000	2400°F (1315°C)	Power Plant, Metal Free
Moly-50	750°F (399°C)	Thread Lubricant
Graphite-50	900°F (482°C)	Electrically Conductive Nonmetallic
Moly Paste	750°F (399°C)	Withstands extreme pressure, heavy loads




Loctite® Silver Grade Anti-Seize
Heavy-duty, temperature-resistant, petroleum-based lubricant compound fortified with graphite and metallic flake. Inert, will not evaporate or harden in extreme cold or heat. For use in assemblies up to 1600°F (871°C). ABS Approved. Tested to MIL-PRF-907E.




Loctite® C5-A® Copper Based Anti-Seize
Exclusive formula suspends copper and graphite in a high-quality grease. Protects metal parts from rust, corrosion, galling, and seizing at temperatures to 1800°F (982°C). Tested to MIL-PRF-907E.




Loctite® Nickel Anti-Seize
Copper-free. Recommended for stainless steel and other metal fittings. For preventing corrosion, seizing, and galling in harsh, chemical environments, and temperatures to 2400°F (1315°C). ABS Approved.




Loctite® Heavy Duty Anti-Seize
Metal-free. Excellent lubricity. Provides outstanding lubrication to all metals including stainless steel, aluminum, and soft metals up to 2400°F (1315°C).



Loctite® Zinc Anti-Seize
Protects aluminum and ferrous surfaces from seizure and corrosion up to 750°F (399°C).



Loctite® Food Grade Anti-Seize
Prevents seizure, galling, and friction in stainless steel and other metal parts up to 750°F (399°C).




Loctite® Marine Grade Anti-Seize
Formulated to protect assemblies exposed directly or indirectly to fresh and salt water, Marine Grade Anti-Seize works especially well in high humidity conditions. It has excellent lubricity, superior water wash-out water spray resistance, and prevents galvanic corrosion. ABS Approved.



Surface Protection and Rust Prevention

- Stabilize existing rust
- Guard against corrosion
- Prevent electro-chemical corrosion
- Increase belt friction

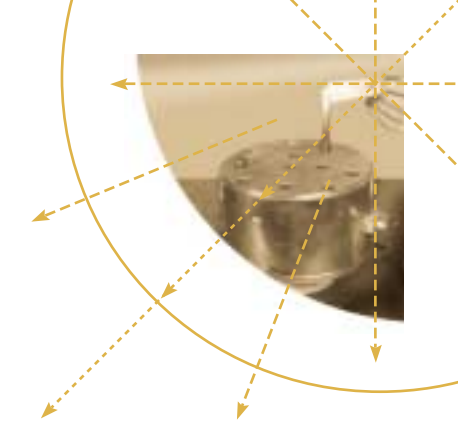

SURFACE PROTECTION AND RUST PREVENTION

Surface Treatment and Rust Prevention

Solution	Belt dressing		Rust treatment		Corrosion protection				
	Belt Dressing & Conditioner	Extend®	Cold Galvanizing Compound	Rubberized Undercoating	General purpose			Color-Guard®	
					Cathodic protection	Undercoating	Non Drying		Color Coding
					Maxi-Coat				
Description	Liquid spray	Rust Converter	Zinc spray	Rubberized spray	Waxy film	Rubber coating			
Color	Colorless	Matte black	Grey	Black	Brown	Red, Yellow, Blue, Black			
Temperature Range	Up to 200°F (93°C)	Up to 250°F (121°C)	Up to 400°F (204°C)	Up to 200°F (93°C)	Up to 200°F (93°C)	Up to 200 °F (93°C)			
Dry Time	N.A.	30 min.	15 min.	20 min.	N.A.	4 hrs.			
Available Sizes	12 oz. aerosol	10.5 oz. aerosol, 1 qt., 1 gallon, 5 gallon	15 oz. aerosol	16 oz. aerosol	12 oz. aerosol, 1 gallon can	11 oz. aerosol, 14.5 fl. oz. can, 1 gallon can			

Additional Products	
Name	Type
Color Guard® Primer	1 gallon
Color Guard® Thinner	1 gallon



Loctite® Belt Dressing & Conditioner
Recommended to prevent slipping and increase friction for all types of belts. It extends belt life. Penetrates the cord fibers of "V" belts to restore pliability and flexibility. Eliminates squeaking and glazing.



Loctite® Extend® Rust Treatment
Converts existing rust into a stable base. Cured product acts as a primer ready for painting. Protects surfaces from corrosion. Use on metal pipes, valves, fittings, storage tanks, fences, guard rails, conveyors, construction and agricultural equipment. ABS Approved.



Loctite® Cold Galvanizing Compound
Sprays on metal surfaces to prevent corrosion even when the surface is scratched. Ideal touch-up for welded seams. Highly resistant to salt corrosion and water. Not resistant to acid or alkaline solutions. Contains no ozone-depleting compounds.



Loctite® Rubberized Undercoating
This heavy-duty undercoating seals, protects, and insulates. Rubberized for maximum durability.



Loctite® Maxi-Coat
Heavy-duty coating provides long-term protection for metal parts, equipment, and machinery. Forms a protective, waxy film which seals out moisture, air, acid, and other corrosive elements. Great for protecting parts in storage. Removable.




Loctite® Color Guard® Tough Rubber Coating
Inhibits rust and corrosion. Seals, insulates, and identifies almost any material in minutes. Creates a non-slip gripping surface. Rubber coating won't crack or chip. Acid and alkali resistant. Dip, spray, or brush to apply. Suggested applications: tools, metal, electrical connections, masonry, wood, conveyors, glass, rope, fabric. Now in a toluene free formulation.




Parts and Surface Cleaning

■ Clean and degrease work surfaces and parts

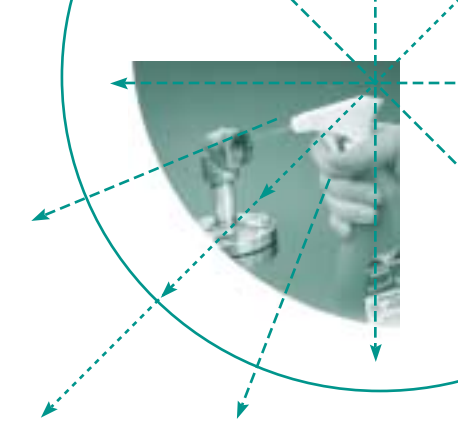

PARTS AND SURFACE CLEANING

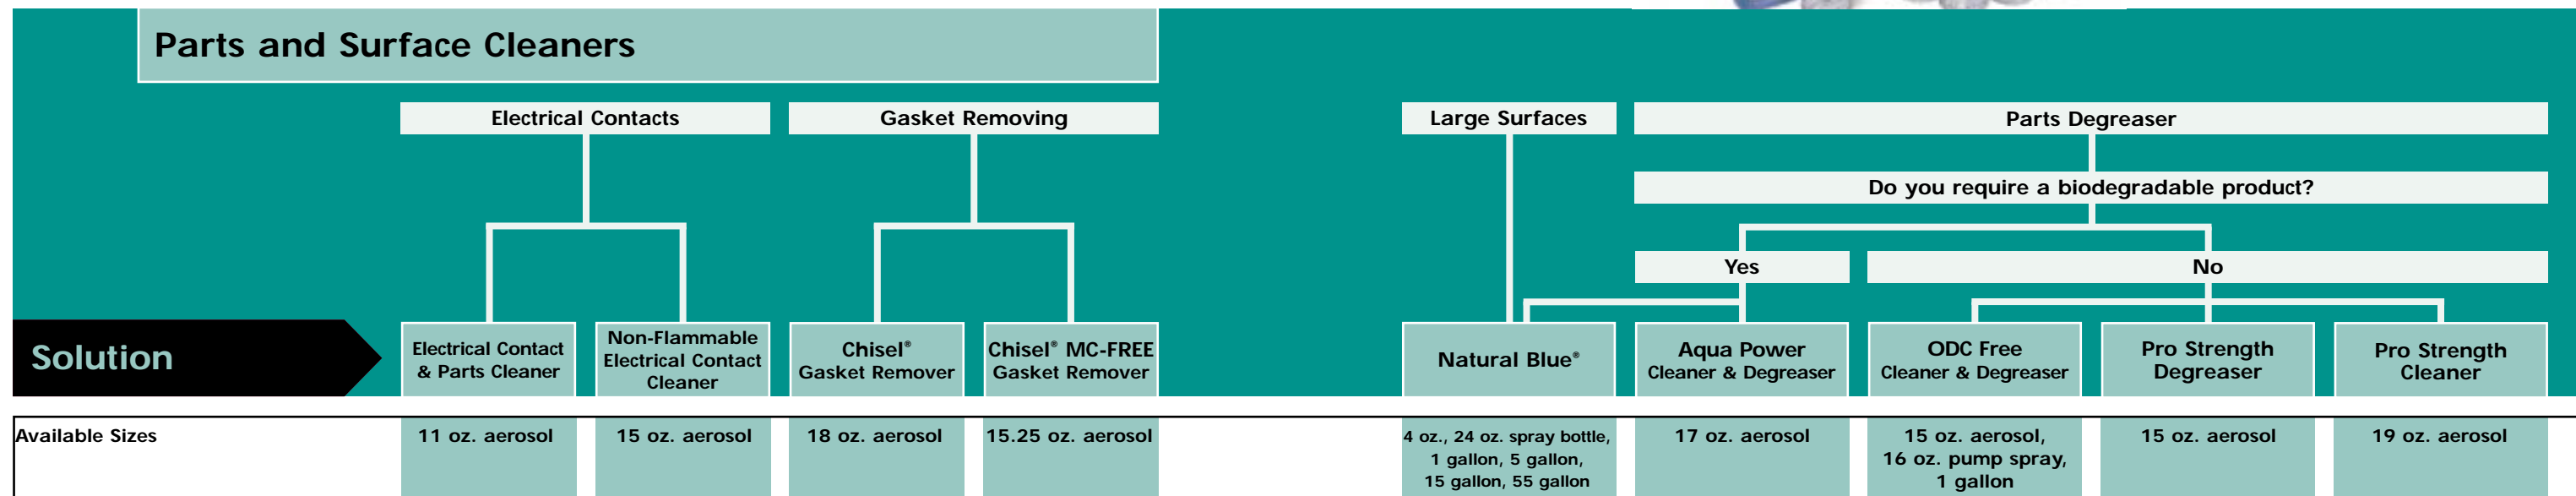

Additional Products	
Name	Size
Pro Strength Varnish Remover	12 oz. Aerosol
Multi-Purpose Glass Cleaner	18.75 oz. Aerosol
Paint Stripper	18 oz. Aerosol
Non-Chlorinated Parts Cleaner	14.75 oz. Aerosol



Loctite® Electrical Contact & Parts Cleaner
Fast-evaporating cleaner removes grease, oil, and other contaminants from electrical parts and mechanical equipment. Contains no CFCs or HCFCs and is safe on most plastics. Non-conductive and non-corrosive.



Loctite® Non-Flammable Electrical Contact Cleaner
Removes grease, oil, and other contaminants from electrical parts to prevent contact failure. Dries residue-free in seconds. Non-conductive, non-corrosive, non-flammable. Contains no CFCs or Class I ODCs. Contains HCFC-141 b. May attack some sensitive plastics.



Loctite® Chisel® Gasket Remover
Removes gaskets from any type of assembly in 10 to 15 minutes. Prepares metal parts for new gaskets, eliminating scraping and sanding. Works on wood; non-corrosive on aluminum. Not for use with plastics, linoleum, or synthetic fibers.



Loctite® Chisel® MC-FREE Gasket Remover
Free of Methylene Chloride, Chisel® MC-FREE has a foaming action that lifts off gaskets from any type of assembly in minutes. Performs better than Methylene Chloride formulations on silicone gaskets and removes most spray paints from steel panels in less than 30 seconds. Suitable for wood and plaster. Not for use on plastics, linoleum, or synthetic fibers.



Loctite® Natural Blue® Cleaner & Degreaser
Biodegradable, all-purpose, industrial strength, concentrated cleaner and degreaser. Can be economically diluted with water. Natural Blue is formulated for wipe down, pressure spraying, and immersion cleaning processes at room temperature or heated. Non-flammable and non-toxic. Contains no ODCs. Available in pine scent or unscented formulas.



Loctite® Aqua Power™ Cleaner & Degreaser
Penetrates, dissolves, and removes dirt and oil. Fast drying and residue-free. Environmentally friendly product is biodegradable, has low toxicity, no ODCs, and is non-corrosive/non-caustic.



Loctite® ODC-Free Cleaner & Degreaser
A non-aqueous, hydrocarbon-based solvent designed for cleaning and degreasing surfaces to be bonded with adhesives, as well as for general purpose industrial cleaning. Safe on aluminum, rubber, and most plastics, and will not cause flash rusting on water-sensitive parts. Dries residue free. Contains no ozone-depleting compounds. (Formerly referenced as 7070).



Loctite® Pro Strength Degreaser
Quickly dissolves and removes grease, oil and dirt from iron, steel, aluminum, magnesium, copper, rubber, plastic, and concrete. Rinses off with water.



Loctite® Pro Strength Parts Cleaner
Aggressively penetrates, dissolves and removes oil and grease from parts. Dries quickly with no residue. Contains no ODCs.




Hand Cleaners

- Fortified with emollients to soothe and protect hands
- Fast, effective, industrial hand cleaners



HAND CLEANERS

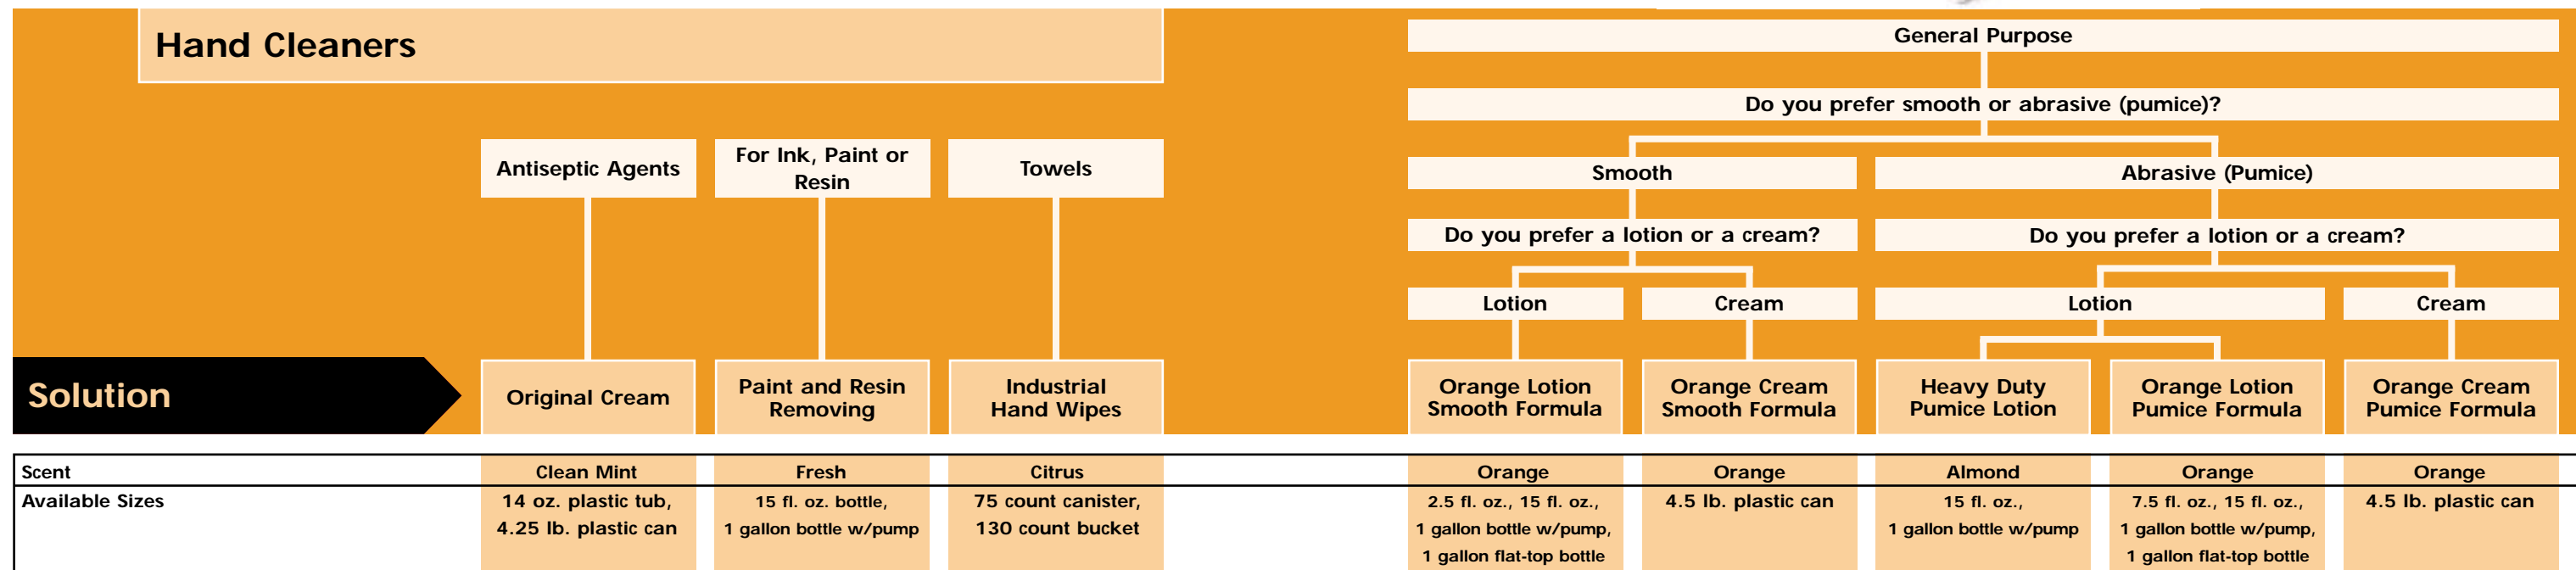

Additional Products	
Dispensers and Accessories	
Replacement Plastic Pump	for 1 gallon pump bottles
Stainless Steel Pump Dispenser	for 1 gallon pump bottles
Wire Wall Bracket	for 1 gallon pump bottles
Push Type Wall Mount Universal Dispenser	for 4.25 lb., 4.5 lb. and flat top gallons

Loctite® Original Cream Hand Cleaner
Formulated to remove tough grease and grime, while premium skin conditioners and antiseptic agents keep sensitive hands protected and conditioned. Works on grease, paint, gasket and tile cements, heavy fuel oil, asphalt, and more.

Loctite® Paint and Resin Removing Hand Cleaner with Fine Pumice
Specially formulated to quickly and safely remove paints, sealants and adhesives, especially those with a urethane base. Unlike lacquer thinner, turpentine, kerosene, or gasoline that can be hazardous to your health when used as a hand cleaner, this cleaner is fortified with lanolin, jojoba, Vitamin E, aloe vera, and glycerin that's gentle on your skin. Wipes or rinses away thoroughly with no sticky oil or residue.

Loctite® Industrial Hand Wipes
Pre-moistened with a powerful citrus scented formula, each 9.5" x 12" wipe is abrasive enough to scrub off the toughest grease and grime without scratching hands. Quick and easy to use, no rinsing, no drying, no residue left behind. Perfect for industrial and commercial working hands in the painting, printing, maintenance, transportation, and construction industries.

Loctite® Orange Lotion Hand Cleaner Smooth Formula
Contains premium-grade cleansing agents that quickly dissolve dirt, grease, resin, ink, paint, glue, rubber gasket and tile cements, and other stubborn soils. Citrus-based, smooth formula is pH balanced and fortified with skin conditioners lanolin, aloe vera, Vitamin E, jojoba, and wheat germ extract to soothe and protect raw, rough hands. Formulated for those who prefer a hand cleaner without pumice, or for those with extra sensitive skin.

Loctite® Orange Cream Hand Cleaner Smooth Formula
Contains all the benefits of our smooth lotion, this cream formula also has a thicker consistency and the package can be wall mounted in our convenient Universal dispenser. Ideal for those who prefer to "scoop" hand cleaner from a tub.

Loctite® Heavy Duty Pumice Lotion Hand Cleaner
A thick, rich, water-soluble lotion formulated to remove the toughest industrial soils without the harsh solvents used in other heavy duty hand cleaners. The fine-ground pumice allows for deeper cleaning and quickly emulsifies dirt, grease, inks, tar, asphalt, oils, lubricants, paints, industrial carbon, and other heavy duty soils. Fortified with antiseptic agents, glycerin, aloe vera, Vitamin E, jojoba, and wheat germ extract to soothe and condition hands without an oily or sticky feel.


Loctite® Orange Lotion Hand Cleaner Pumice Formula
Contains premium-grade cleansing agents that quickly dissolve the toughest soils. The added pumice safely and effectively removes dirt, grease, resin, ink, paint, glue, rubber gasket and tile cements, and many other hard to remove soils. This citrus-based, pH balanced formula is fortified with the skin conditioners lanolin, aloe vera, Vitamin E, jojoba, and wheat germ extract to soothe and protect raw, rough hands.

Loctite® Orange Cream Hand Cleaner Pumice Formula
Contains all the benefits of our lotion pumice formula in a thicker consistency. The package can be wall-mounted in our convenient Universal dispenser. Ideal for those who prefer to "scoop" hand cleaner from a tub.




Bonding

- Assemble parts quickly and easily
- Repair broken parts
- Dissimilar parts can be bonded

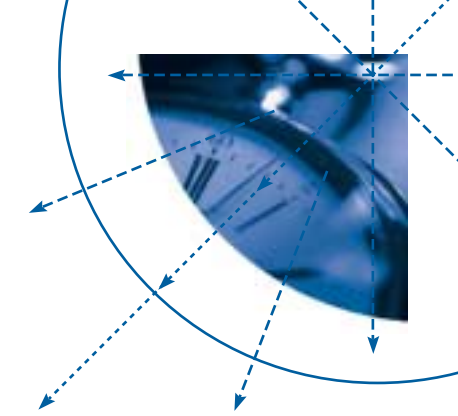

BONDING

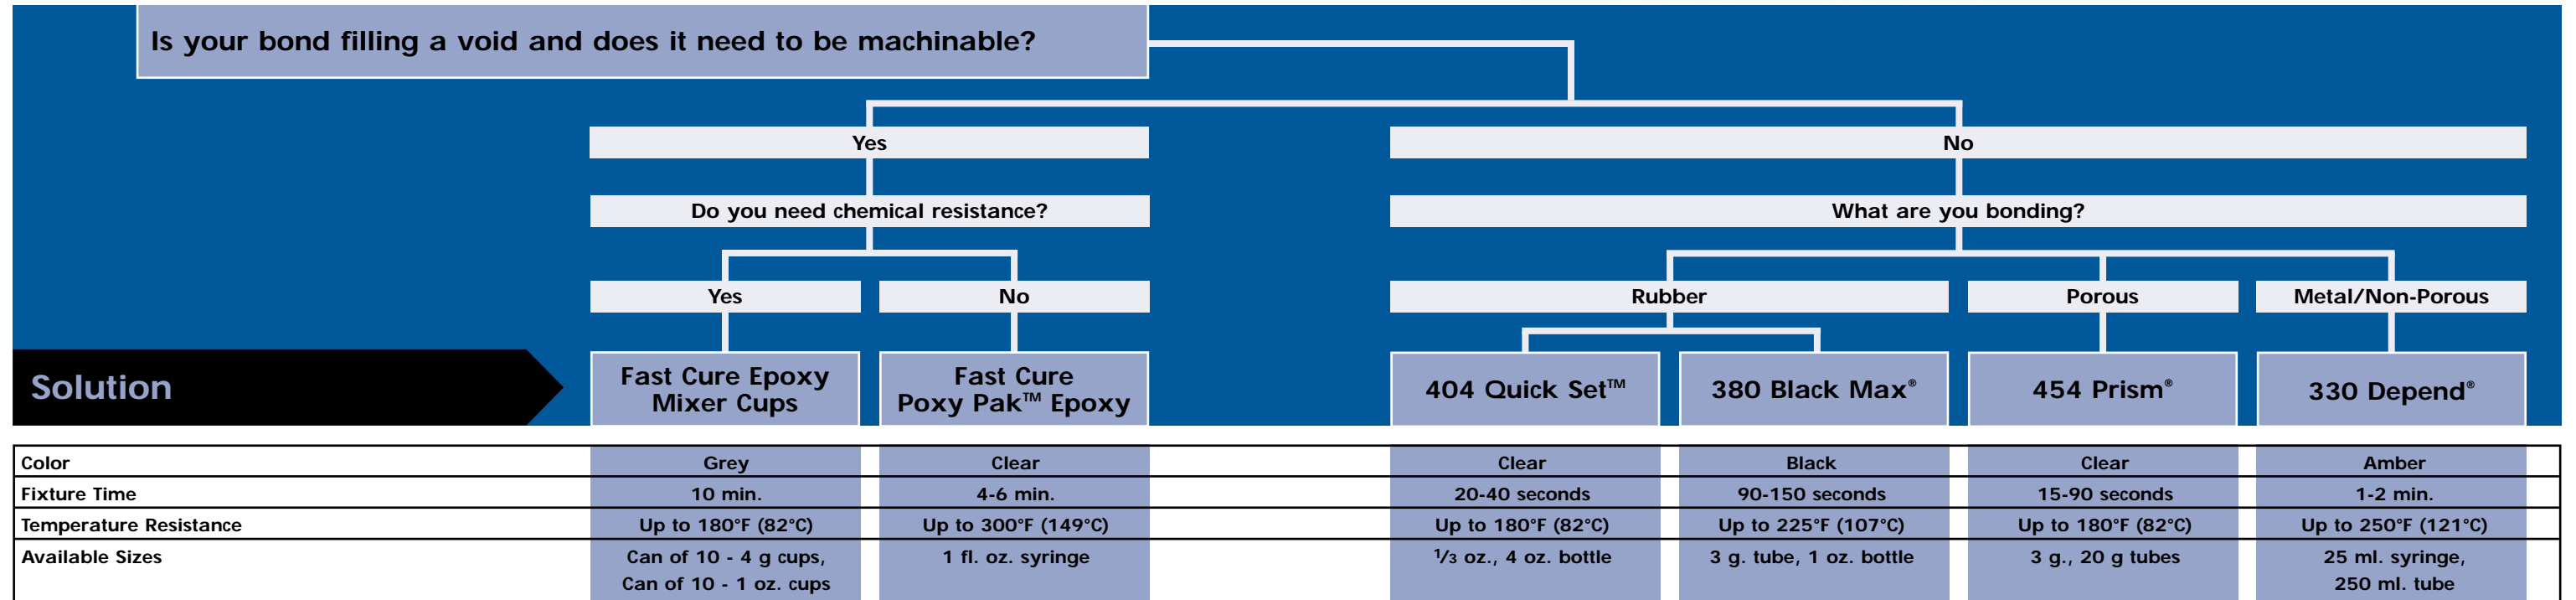

Additional Products	
Product	Features
Black Contact Adhesive	Flexible, resists gasolines, waterproof
Contact Adhesive	Flexible, withstands freezing temperatures
All Purpose Spray Adhesive	Water Resistant Spray
Max Strength Spray Adhesive	Resists extreme weather conditions
Fixmaster® 4 Minute Epoxy	Translucent, fast curing
Fixmaster® General Purpose Epoxy Mixing Cups	Single use, bonds porous and non-porous surfaces
Fixmaster® High Performance Epoxy	Fiberglass reinforced, shock resistant



Loctite® Fixmaster® Fast Cure Epoxy Mixer Cups

Premeasured epoxy mixer cups. Bonds in 5-15 minutes. Excellent chemical resistance. Fills porosities and can be used to build up worn parts. Ideal for bonding glass, hard plastics, rubber, and metal.



Loctite® Fixmaster® Fast Cure Poxy Pak™ Epoxy

This fast-cure, high-strength, thick liquid reaches handling strength in 4-6 minutes. Bonds virtually any material to repair, fill, and seal holes, cracks, and worn surfaces. ABS Approved.



Loctite® 404 Quick Set™ Instant Adhesive

This general-purpose Quick Set™ instant adhesive liquid is the one adhesive everyone needs in their toolbox for general maintenance and repair. It sets instantly. No clamping, no mixing, no waiting. Keep it handy to bond just about anything in an instant. Bonds rubber to rubber, i.e. making O-rings. ABS Approved.



Loctite® 380 Black Max® Instant Adhesive

For parts that encounter shock, vibration, or thermal cycling, 380 is the instant adhesive choice. This black, toughened cyanoacrylate adhesive uses elastomers to withstand impact and challenging environmental conditions. Seals as well as bonds. Works especially well bonding rubber to metal.



Loctite® 454 Prism® Instant Adhesive

The ideal adhesive for porous substrates, 454 is a clear gel adhesive. As a surface insensitive cyanoacrylate, it is ideal for difficult-to-bond substrates, including rough, porous, and acidic surfaces. Need to bond something on a vertical surface. This gel formulation won't run off before you put substrates together. ABS Approved.




Loctite® 330 Depend® Adhesive

330 Depend® sets in just minutes to a tough acrylic adhesive with high peel and impact strength. Bonds almost all combinations of materials, including glass. No-mix kit includes activator and adhesive.




Kits, Specialty, and Emergency Repair Products

- Enables rapid repair of damaged or burst pipes, conveyor or drive belts, and similar rubber-based components
- Will seal leaks in tanks and other containment vessels in addition to repairing metal parts
- Includes a kit for repairing or replacing damaged o-ring seals

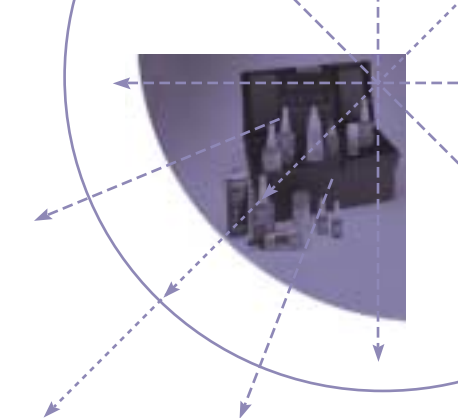


KITS, SPECIALTY AND EMERGENCY REPAIR PRODUCTS

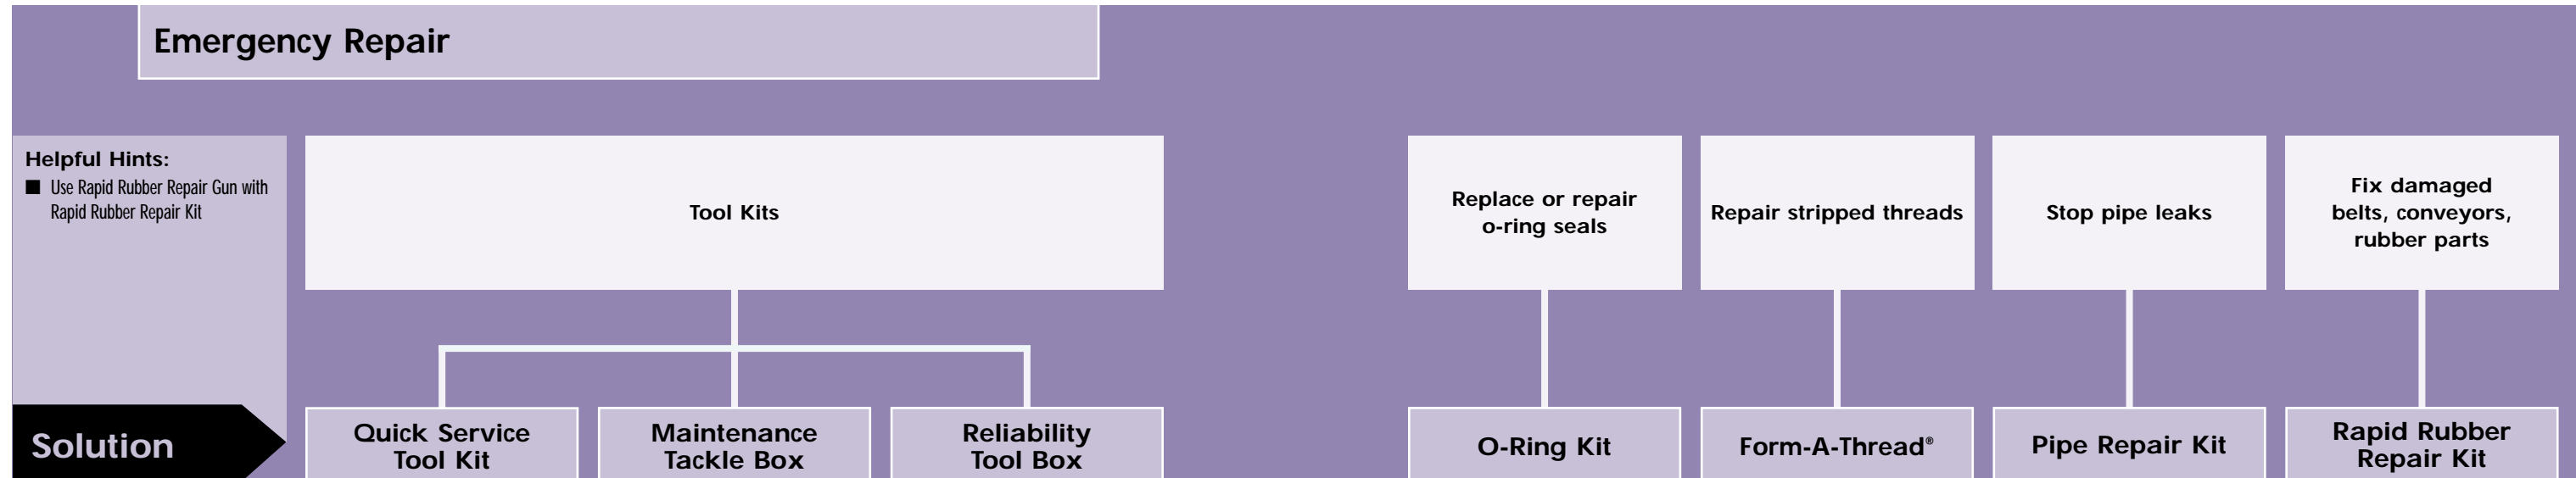

Loctite® Quick Service Tool Kit
 This compact kit contains everything needed to solve the most common mechanical failures. Contains 242® Medium, 10 ml; 262 High Strength Threadlockers, 10 ml; 7649 Primer/Activator, 4.5 oz.; Prism® 454 Instant Adhesive Gel, 3 g; Quick Metal® 660 Retaining Compound, 6 ml; 565 Thread Sealant, 50 ml; 587 Blue Silicone Gasket Maker, 70 ml; 518 Gasket Eliminator®, 50ml.



Loctite® Maintenance Tackle Box
 The Maintenance Tackle Box is designed to fit in a mechanic's tool chest. Contains 242® Threadlocker, 50 ml; 262 Permanent TL, 50 ml; 609 Retaining Compound, 50 ml; 660 Quick Metal®, 50 ml; 565 Thread Sealant, 50 ml; 518 Gasket Eliminator®, 50 ml; 598 High Performance Black Silicone; 7649 Primer N, 25 g; Do it Right User's Guide.



Loctite® Reliability Tool Box
 Designed for the Manufacturing Reliability program, this tool box contains 222 Low Strength Threadlocker, 10ml; 242® Removable Threadlocker, 50ml; 262 High Strength Threadlocker, 50ml; 209 Wicking Threadlocker, 50ml; 7649 Primer N Aerosol, 0.88 oz.; 565 PST® Thread Sealant, 50ml; 545 Hydraulic/Pneumatic Thread Sealant, 50ml; 518 Gasket Eliminator®, 50ml; Instant Gasket, 7oz.; 609 Retaining Compound, 10ml; 660 Quick Metal®, 50ml; Loctite® 55 Pipe Sealing Cord.



Loctite® O-Ring Making Kit
 Eliminates the need for an inventory of different sized O-rings. Joints resist water and oil and are as strong as the rubber itself. Contains 3 ft. lengths of common diameters of Buna N cord, Quick Set™ 404 Instant Adhesive, O-ring fixture, blade, water-proofing solution, and cleanup solution.



Loctite® Form-A-Thread® Stripped Thread Repair Kit
 Permanently repairs stripped threads and fasteners in five minutes (up to SAE Grade 5 English and 8.8 metric). Allows up to 128 lb. torque and 300°F. Resists most shop fluids.



Loctite® Pipe Repair Kit
 No tools required. Cures in 30 minutes. Easy-to-use repair kit. Use for temporary/medium term repair of leaking pipes, and reinforcement of weak areas. Kit contains protective gloves, Loctite® Metal Magic Steel™ Stick, and urethane-impregnated fiberglass tape.



Loctite® Fixmaster® Rapid Rubber Repair Kit
 Fast, long-term repairs to conveyor belts. Remains flexible. Easy application. This kit is a fast-curing, two-part flexible adhesive/sealant system in an easy-to-use pack. Operating temperature up to 80 °C. Applications include repair of worn and torn conveyor belts and other rubber equipment.



Accessories

■ Loctite® accessories are specially designed to make application and use of Loctite® products fast, precise, clean, and economical.

ACCESSORIES



Loctite® 97001 Peristaltic hand-pump

This hand-held applicator is a low-cost, precision bottle top applicator that mounts easily on the top of any Loctite 50 ml or 250 ml bottle.



Loctite® 96121 Phenolic Roller and 96153 Bristle Roller

These rollers are recommended for applying the Big Foot™ range of flooring compounds. The Phenolic Roller gives a rough surface and the Bristle Roller is used for applying primers and sealers.



Loctite® 96131 Mixer Blade

For use with all 1 gallon kits of Big Foot™ flooring compounds.



Loctite® 983531 Dual Cartridge Applicator

Two-component epoxies are dispensed through handheld, manually operated, meter-mix dispensers. These dispensers provide a convenient, cost-effective method to apply product with minimal waste.



Loctite® 39635 Fixmaster® Rapid Rubber Repair Gun

Easy to use applicator for the Rapid Rubber Repair Kit.



Loctite® 39633 Fixmaster® Rapid Rubber Repair Static Mixers

These mixing nozzles are for use with Rapid Rubber Repair Urethane in the 400 ml cartridge. Packaged 6 nozzles per case.

LOCTITE®

Need It Now!



Name: _____


Area: _____



Check the box for items you need

Item No.	Loctite Product	Pkg. Size	Item No.	Loctite Product	Pkg. Size	Item No.	Loctite Product	Pkg. Size
Threadlocking			Anti-Slip Flooring			Hand Cleaning		
<input type="checkbox"/> 29031	290 – Green	50 ml	<input type="checkbox"/> 96251	Big Foot™ Vehicular Grade – Grey	1 gal	<input type="checkbox"/> 34663	Chisel® MC-FREE	15.25 oz
<input type="checkbox"/> 22231	222MS – Purple	50 ml	<input type="checkbox"/> 39915	Big Foot™ Zero VOC – Grey	1 gal	<input type="checkbox"/> 82249	Natural Blue®	24 oz
<input type="checkbox"/> 24231	242® – Blue	50 ml	<input type="checkbox"/> 95641	Big Foot™ Low Profile	1 gal	<input type="checkbox"/> 30569	Aqua Power™ Cleaner Degreaser	17 oz
<input type="checkbox"/> 24078	243 – Blue	50 ml	<input type="checkbox"/> 96261	Big Foot™ Heavy Duty – Grey	1 gal	<input type="checkbox"/> 22355	ODC Free Cleaner Degreaser	15 oz
<input type="checkbox"/> 26231	262 – Red	50 ml	<input type="checkbox"/> 95591	Big Foot™ Acrylic – Grey	1 gal	<input type="checkbox"/> 30521	Pro Strength Degreaser	15 oz
Thread Sealing			Grouting			<input type="checkbox"/> 30548 Pro Strength Cleaner 19 oz		
<input type="checkbox"/> 35082	55 Pipe Sealing Cord	5,700 in.	<input type="checkbox"/> 97572	Marine Chocking – Green	2 gal	<input type="checkbox"/> 01013	Loctite® Original Cream	14 oz
<input type="checkbox"/> 80725	No More Leaks™	2 oz	<input type="checkbox"/> 39637	Fast Set Grout	2 gal	<input type="checkbox"/> 65218	Paint and Resin Removing	1 gal
<input type="checkbox"/> 54531	545	50 ml	<input type="checkbox"/> 99545	Deep Pour Grout	5 gal	<input type="checkbox"/> 34943	Industrial Hand Wipes	75 count
<input type="checkbox"/> 56531	565 PST®	50 ml	<input type="checkbox"/> 33510	Super Grout	5 gal	<input type="checkbox"/> 23218	Loctite® Orange Smooth Lotion	1 gal
<input type="checkbox"/> 56747	567 PST®	50 ml	Belt Repair			<input type="checkbox"/> 33406	Loctite® Orange Smooth Cream	4.5 lb
Gasketing			<input type="checkbox"/> 97033	Instant Belt Repair	1 lb	<input type="checkbox"/> 21218	Loctite® Heavy Duty Pumice	1 gal
<input type="checkbox"/> 51831	518 Gasket Eliminator®	50 ml	<input type="checkbox"/> 96671	Rapid Rubber Repair	400 ml	<input type="checkbox"/> 25218	Loctite® Orange Pumice Lotion	1 gal
<input type="checkbox"/> 30526	Hi-Tack™ Gasket Sealant	9 oz	<input type="checkbox"/> 98693	Flex Conveyor Belt Repair Kit	1 lb	<input type="checkbox"/> 35406	Loctite® Orange Pumice Cream	4.5 lb
<input type="checkbox"/> 51031	510 Gasket Eliminator®	50 ml	Lubrication – Anti-Seize			Bonding		
<input type="checkbox"/> 59675	Superflex™ Red High Temp	300 ml	<input type="checkbox"/> 76764	Silver Grade	1 lb	<input type="checkbox"/> 21426	Fast Cure Epoxy Mixer Cups	10 - 1 oz
<input type="checkbox"/> 58775	587 Blue High Performance	300 ml	<input type="checkbox"/> 51007	C5-A® Copper	1 lb	<input type="checkbox"/> 81120	Poxy Pak™	1 oz
<input type="checkbox"/> 30507	Instant Gasket	7 oz	<input type="checkbox"/> 77164	Nickel	1 lb	<input type="checkbox"/> 46548	404 Quick Set™	4 oz
Retaining			<input type="checkbox"/> 51606	Heavy Duty	1 lb	<input type="checkbox"/> 38050	380 Black Max®	1 oz
<input type="checkbox"/> 66040	660 Quick Metal®	50 ml	<input type="checkbox"/> 39901	Zinc	1 lb	<input type="checkbox"/> 45440	454 Prism®	20 g
<input type="checkbox"/> 60931	Retaining Compound 609	50 ml	<input type="checkbox"/> 51168	Food Grade	8 oz	<input type="checkbox"/> 20251	330 Depend Adhesive®	25 ml
<input type="checkbox"/> 62040	Retaining Compound 620	50 ml	<input type="checkbox"/> 34395	Marine Grade	8 oz	Kits, Specialty and Emergency Repair Products		
<input type="checkbox"/> 68035	Retaining Compound 680	50 ml	Lubricants – Oil, Greases, and Dry Film			<input type="checkbox"/> 00101	Quick Service Tool Kit	
<input type="checkbox"/> 21441	Retaining Compound 603	50 ml	<input type="checkbox"/> 39895	Moly Dry Film	12 oz	<input type="checkbox"/> 33486	Maintenance Tackle Box	
Metal Rebuilding and Shaft Repair			<input type="checkbox"/> 30138	Krytox® RFE Dry Lubricant	8 oz	<input type="checkbox"/> 31362	Reliability Tool Box	
<input type="checkbox"/> 97483	Steel Liquid	1 lb	<input type="checkbox"/> 30394	Krytox® Synthetic Lubricating Oil	8 oz	<input type="checkbox"/> 00112	O-Ring Kit	
<input type="checkbox"/> 99913	Steel Putty	1 lb	<input type="checkbox"/> 29709	Krytox® High Performance Lub.	16 oz	<input type="checkbox"/> 28654	Form-A-Thread®	
<input type="checkbox"/> 39917	Fast Set Steel Putty	1 lb	<input type="checkbox"/> 29710	Krytox® Lubricant	2 oz	<input type="checkbox"/> 96321	Pipe Repair Kit	2" x 6'
<input type="checkbox"/> 98853	Metal Magic Steel™	4 oz	<input type="checkbox"/> 36788	ViperLube™ Lightweight Oil	1 gal	<input type="checkbox"/> 96673	Rapid Rubber Repair Kit	
<input type="checkbox"/> 97453	Aluminum Liquid	1 lb	<input type="checkbox"/> 36787	ViperLube™ Gear Oil	1 gal	Accessories		
<input type="checkbox"/> 97463	Aluminum Putty	1 lb	<input type="checkbox"/> 36782	ViperLube™ Grease Cartridge	14 oz	<input type="checkbox"/> 97001	Peristaltic Hand-pump	
<input type="checkbox"/> 97473	Superior Metal	1 lb	<input type="checkbox"/> 36783	ViperLube™ Grease Can	1 lb	<input type="checkbox"/> 96121	Phenolic Roller	
Wear Prevention and Rebuild			<input type="checkbox"/> 36786	ViperLube™ Grease Aerosol	11 oz	<input type="checkbox"/> 96153	Bristle Roller	
<input type="checkbox"/> 99813	Wearing Compound	5 lb	Surface Protection and Rust Prevention			<input type="checkbox"/> 96131	Mixing Blade	
<input type="checkbox"/> 39918	High Impact Wearing Compound	25 lb	<input type="checkbox"/> 30527	Belt Dressing and Conditioner	12 oz	<input type="checkbox"/> 983531	Dual Cartridge Applicator	
<input type="checkbox"/> 98383	Pneu-Wear	3 lb	<input type="checkbox"/> 75448	Extend®	1 gal	<input type="checkbox"/> 39635	Fixmaster® Rapid Rubber Repair Gun	
<input type="checkbox"/> 98733	Brushable Ceramic – Grey	2 lb	<input type="checkbox"/> 82039	Cold Galvanizing Compound	15 oz	<input type="checkbox"/> 39633	Fixmaster® Rapid Rubber Repair Static Mixers	
<input type="checkbox"/> 96303	Combo Bead Wearing Compound	6 lb	<input type="checkbox"/> 30538	Rubberized Undercoating	16 oz	Primers		
<input type="checkbox"/> 97401	Flex Brushable	1 lb	<input type="checkbox"/> 51211	Maxi-Coat	16 oz	<input type="checkbox"/> 21348	Primer N	4.5 oz.
<input type="checkbox"/> 97423	Flex 80 Putty	1 lb	<input type="checkbox"/> 34983	Color Guard® – Blue	1 gal	<input type="checkbox"/> 96132	Bigfoot™ Metal Primer	1 gal
Floor and Concrete Repair			Parts and Surface Cleaning			<input type="checkbox"/> 95581	Bigfoot™ Acrylic Primer	1 gal
<input type="checkbox"/> 96495	High Performance Quartz	42 lb	<input type="checkbox"/> 25791	Electrical Contact and Parts	11 oz	<input type="checkbox"/> 94142	Bigfoot™ Primer/Sealer	1 gal
<input type="checkbox"/> 99361	Floor Fill	10 lb	<input type="checkbox"/> 24379	Non-Flammable Electrical Contact Cleaner	15 oz			
<input type="checkbox"/> 95551	Magna-Crete®	1 gal	<input type="checkbox"/> 79040	Chisel® Gasket Remover	18 oz			
<input type="checkbox"/> 97413	Flex 80 Liquid	1 lb						

NEED IT NOW!

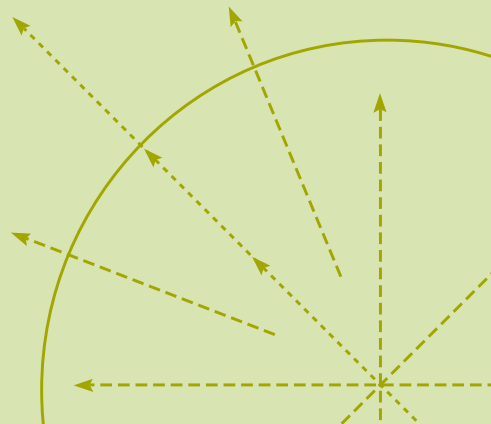



Name: _____

Area: _____

Reliability Improvement Suggestion

1. Problem Equipment _____ Department or Area _____
 Describe problem including failing components: _____

 How often does this happen? _____ Times per month _____ Times per year
 Describe negative impact: _____

 Describe your intended actions including products to be used: _____

 Necessary products issued? Yes No Need Loctite rep help? Yes No

2. Problem Equipment _____ Department or Area _____
 Describe problem including failing components: _____

 How often does this happen? _____ Times per month _____ Times per year
 Describe negative impact: _____

 Describe your intended actions including products to be used: _____

 Necessary products issued? Yes No Need Loctite rep help? Yes No

Additional Training Needed

Topics (Check appropriate boxes)	Comments
<input type="checkbox"/> Mechanical Basics & Failure Root Causes	_____
<input type="checkbox"/> Rebuild/Resurface Shafts <input type="checkbox"/> Wear Prevention	_____
<input type="checkbox"/> Machine Base Grouting	_____
<input type="checkbox"/> Belt Jointing & Repair	_____
<input type="checkbox"/> Floor Repair & Resurface	_____
<input type="checkbox"/> Anti-Slip Safety Flooring	_____
<input type="checkbox"/> Corrosion Protection (tanks, decking, etc.)	_____

Training Critique

Check appropriate boxes	Great	O.K.	Poor
I learned useful information and proactive techniques for my job	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The instructor was well informed and his style made it easy to learn	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The examples helped me to understand where I can help increase reliability	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The demos and visual aids were used effectively and helped me learn	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The reference handouts are on target and will be helpful reminders	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Length of class <input type="checkbox"/> Too Long <input type="checkbox"/> Just right <input type="checkbox"/> Too Short			
Pace of class <input type="checkbox"/> Too Fast <input type="checkbox"/> Just Right <input type="checkbox"/> Too Slow			
Comments: _____			

Product Ordering Information



■ Search by Loctite Product number on these pages.

Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page
00101	Quick Service Tool Kit		36	29709	Krytox® RFE PFPE Bearing Lubricant	16 oz.	24
00112	O-Ring Making Kit		37	29710	Krytox® RFE PFPE O-Ring Lubricant	2 oz.	24
01013	Original Cream Hand Cleaner	14 oz.	32	29711	Krytox® RFE PFPE High Performance Lubricant	2 oz.	24
01406	Original Cream Hand Cleaner	4.25 lb.	32	30138	Krytox® RFE Advanced PTFE Dry Lubricant	8 oz. aerosol	24
18581	5699 RTV Grey Silicone Gasket Maker	300 ml	8	30287	Retaining Compound 660 Quick Metal® Press Fit Repair	250 ml	10
18718	5699 RTV Grey Silicone Gasket Maker	70 ml	8	30394	Krytox® RFE Synthetic PFPE Lubricating Oil	8 oz. aerosol	24
20162	ODC-Free Cleaner & Degreaser	16 fl. oz.	4, 6, 8, 31	30507	Instant Gasket	7 oz.	9
20251	Depend® 330 No-Mix Adhesive Kit	25 ml	35	30509	Instant Gasket	5 oz.	9
20252	Depend® 330 No-Mix Adhesive Kit	250 ml	35	30510	Gasket Sealant #1	1.5 oz.	8
20279	Fragrance-Free Natural Blue® Cleaner & Degreaser	55 gal.	31	30511	Gasket Sealant #1	3 oz.	8
21116	Heavy Duty Pumice Lotion Hand Cleaner	15 fl. oz.	33	30512	Gasket Sealant #1	11 oz.	8
21218	Heavy Duty Pumice Lotion Hand Cleaner	1 gal.	33	30513	Gasket Sealant #2	1.5 oz.	8
21347	Primer N 7649 (Acetone)	25 g	4, 6	30514	Gasket Sealant #2	3 oz.	8
21348	Primer N 7649 (Acetone)	4.5 oz.	4, 6	30515	Gasket Sealant #2	11 oz.	8
21425	Fixmaster® Fast Cure Epoxy Mixer Cups	10 - 2 fl. oz. cups	34	30516	Aviation Gasket Sealant	1 pt.	8
21426	Fixmaster® Fast Cure Epoxy Mixer Cups	10 - 1 oz. cups	34	30517	Aviation Gasket Sealant	0.25 pt.	8
21427	Fixmaster® General Purpose Epoxy Mixer Cups	10 - .12 fl. oz. cups	34	30518	Superflex® Blue RTV Silicone Adhesive Sealant	12 oz.	8
21434	Threadlocker 277 High Strength/Large Threads	10 ml	4	30521	Pro Strength Degreaser	15 oz. aerosol	31
21440	Retaining Compound 603 Oil Tolerant	10 ml	11	30522	Hydraulic Jack Oil	1 qt.	24
21441	Retaining Compound 603 Oil Tolerant	50 ml	11	30523	Hydraulic Jack Oil	1 gal.	24
21442	Retaining Compound 603 Oil Tolerant	250 ml	11	30524	Hi-Tack Gasket Sealant	.25 pt.	8
22041	Threadlocker 220 Medium Strength/Wicking	250 ml	4	30525	Hi-Tack Gasket Sealant	1 pt.	8
22221	Threadlocker 222MS Low Strength/Small Screw	10 ml	5	30526	Hi-Tack Gasket Sealant	9 oz.	8
22231	Threadlocker 222MS Low Strength/Small Screw	50 ml	5	30527	Belt Dressing & Conditioner	12 oz. aerosol	28
22241	Threadlocker 222MS Low Strength/Small Screw	250 ml	5	30529	Pro Strength Varnish Remover	12 oz. aerosol	30
22355	ODC-Free Cleaner & Degreaser	15 oz.	4, 6, 8, 31	30530	White Lithium Grease	1.5 oz.	24
23104	Orange Lotion Hand Cleaner (Smooth Formula)	1 gal. flat-top	33	30533	Superflex® Blue RTV Silicone Adhesive Sealant	300 ml	8
23108	Orange Lotion Hand Cleaner (Smooth Formula)	7.5 fl. oz.	33	30534	Thread Sealant with Teflon®	.25 pt.	6
23116	Orange Lotion Hand Cleaner (Smooth Formula)	15 fl. oz.	33	30536	Dielectric Grease	0.33 oz.	24
23218	Orange Lotion Hand Cleaner (Smooth Formula)	1 gal.	33	30537	Contact Adhesive	5 fl. oz.	34
23811	Fragrance-Free Natural Blue® Cleaner & Degreaser	1 gal.	31	30538	Rubberized Undercoating	16 oz. aerosol	29
24077	Threadlocker 243 Oil Resistant/Medium Strength	10 ml	5	30539	Extend® Rust Treatment	10.5 oz. aerosol	28
24078	Threadlocker 243 Oil Resistant/Medium Strength	50 ml	5	30540	Black Contact Adhesive	5 fl. oz.	34
24079	Threadlocker 243 Oil Resistant/Medium Strength	250 ml	5	30541	Superflex® Blue RTV Silicone Adhesive Sealant	7.25 oz.	8
24221	Threadlocker 242® Removable	10 ml	5	30542	5920 RTV Copper Silicone Gasket Maker	70 ml	8
24231	Threadlocker 242® Removable	50 ml	5	30543	White Lithium Grease	10.75 oz. aerosol	24
24241	Threadlocker 242® Removable	250 ml	5	30544	All Purpose Spray Adhesive	10.5 oz.	34
24379	Non-Flammable Electrical Contact Cleaner	15 oz. aerosol	30	30545	Non-Chlorinated Parts Cleaner	14.75 oz. aerosol	30
25104	Orange Lotion Hand Cleaner (Fine Pumice Formula)	1 gal. flat-top	33	30546	Multi-Purpose Glass Cleaner	18.75 oz. aerosol	30
25108	Orange Lotion Hand Cleaner (Fine Pumice Formula)	7.5 fl. oz.	33	30548	Pro Strength Parts Cleaner	19 oz. aerosol	31
25116	Orange Lotion Hand Cleaner (Fine Pumice Formula)	15 fl. oz.	33	30556	Pipe Joint Compound	.25 pt.	6
25218	Orange Lotion Hand Cleaner (Fine Pumice Formula)	1 gal.	33	30557	Pipe Joint Compound	1 pt.	6
25791	Electrical Contact & Parts Cleaner	11 oz. aerosol	30	30560	Superflex® Blue RTV Silicone Adhesive Sealant	80 ml	8
26221	Threadlocker 262 Permanent	10 ml	5	30561	Thread Sealant with Teflon®	1 pt.	6
26231	Threadlocker 262 Permanent	50 ml	5	30562	Superflex® Clear RTV Silicone Adhesive Sealant	7.25 oz.	8
26241	Threadlocker 262 Permanent	250 ml	5	30563	Superflex® Black RTV Silicone Adhesive Sealant	7.25 oz.	8
27240	Threadlocker 272 High Temp/High Strength	50 ml	4	30564	Superflex® Red High Temp RTV Silicone Adhesive Sealant	7.25 oz.	9
27270	Threadlocker 272 High Temp/High Strength	250 ml	4	30565	Aqua Power™ Cleaner & Degreaser	17 oz. aerosol	31
27731	Threadlocker 277 High Strength/Large Threads	50 ml	4	30567	587 RTV Blue Silicone Gasket Maker	8.75 oz.	9
27741	Threadlocker 277 High Strength/Large Threads	250 ml	4	30568	Max Strength Spray Adhesive	16.75 oz.	34
28654	Form-A-Thread® Stripped Thread Repair Kit	4.8 ml	37	30615	Krytox® RFE Cleaner	10 oz. aerosol	24
28753	Thread Sealant 564 Lower Strength	6 ml	6	30684	Instant Gasket	4 oz.	9
28754	Thread Sealant 564 Lower Strength	50 ml	6	31360	Krytox® RFE Bearing Lubricant CP	16 lb.	25
28755	Thread Sealant 564 Lower Strength	250 ml	6	31361	Krytox® RFE Bearing Lubricant CP	16 oz.	25
29021	Threadlocker 290 Wicking Grade	10 ml	4	31362	Reliability Tool Box		36
29031	Threadlocker 290 Wicking Grade	50 ml	4	32429	Thread Sealant 545 Hydraulic/Pneumatic	10 ml	7
29041	Threadlocker 290 Wicking Grade	250 ml	4	32525	Threadlocker 2760 High Strength Primerless	10 ml	4

Product Ordering Information



Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page	Part Number	Product Name	Pack-Size	Page
32526	Threadlocker 2760 High Strength Primerless	50 ml	4	39897	Moly Dry Film	10 lb.	24	51299	C5-A [®] Copper Based Anti-Seize	2 g	26	79040	Chisel [®] Gasket Remover (Methylene Chloride)	18 oz.	8, 30
32527	Threadlocker 2760 High Strength Primerless	250 ml	4	39898	Moly Dry Film	50 lb.	24	51346	N-5000 High Purity Anti-Seize	1 oz.	26	80032	Penetrating Oil	1 pt.	24
33058	Depend [®] 330 No-Mix Adhesive	250 ml	35	39901	Zinc Anti-Seize	1 lb.	27	51360	Silicone Lubricant	5.3 oz.	24	80206	Silver Grade Anti-Seize	1 gal.	26
33064	Depend [®] 330 No-Mix Adhesive	300 ml	35	39915	Big Foot [™] Zero V.O.C. Grey	1 gal.	18	51387	Superflex [™] Non-Corrosive RTV Silicone	80 ml	8	80209	Silver Grade Anti-Seize	4 oz.	26
33241	Thread Sealant 567 PST [®] High Temperature	16 oz.	7	39916	Urethane Sealant - grey	10.2 oz.	16	51388	Superflex [™] Non-Corrosive RTV Silicone	300 ml	8	80724	No More Leaks [™] Plastic Pipe Sealant	7 fl. oz.	7
33406	Orange Cream Hand Cleaner (Smooth Formula)	4.5 lb.	33	39917	Fixmaster [®] Fast Set Steel Putty	1 lb.	12	51572	High Performance N-5000 High Purity Anti-Seize (max lubrication)	1 lb.	26	80725	No More Leaks [™] Plastic Pipe Sealant	2 fl. oz.	7
33486	Maintenance Tackle Box		36	39918	Nordbak [®] High Impact Wearing Compound	25 lb.	14	51605	Heavy Duty Anti-Seize	9 oz.	27	80726	No More Leaks [™] Plastic Pipe Sealant	1 pt.	7
33510	Fixmaster [®] Super Grout	5 gal.	21	45404	Prism [®] 454 Surface Insensitive Instant Adhesive Gel	3 g	35	51606	Heavy Duty Anti-Seize	1.2 lb.	27	80964	Gasket Sealant #2	5 gal.	8
33946	Threadlocker 2440 Primerless/Medium Strength	10 ml	4	45440	Prism [®] 454 Surface Insensitive Instant Adhesive Gel	20 g	35	51607	Heavy Duty Anti-Seize	2.3 lb.	27	81120	Fixmaster [®] Fast Cure Poxy Pak [™] Epoxy (Clear Liquid)	1 oz.	34
33947	Threadlocker 2440 Primerless/Medium Strength	50 ml	4	46548	Quick Set [™] 404 Instant Adhesive	4 oz.	35	51608	Heavy Duty Anti-Seize	45 lb.	27	81204	Maintain [™] Lubricant, Moisture Displacer & Rust Preventer	16 oz. aerosol	24
33948	Threadlocker 2440 Primerless/Medium Strength	250 ml	4	46551	Quick Set [™] 404 Instant Adhesive	1/3 oz.	35	51609	Heavy Duty Anti-Seize	1 oz.	27	81246	Silicone Lubricant	13 oz. aerosol	24
33957	Big Foot [™] Vehicular Grade, Tile Red	5 gal.	18	51001	C5-A [®] Copper Based Anti-Seize	1 oz.	26	51817	Flange Sealant 518 Gasket Eliminator [®]	6 ml	8,9	81251	Gear, Chain and Cable Lubricant	12 oz. aerosol	24
34018	598 RTV Black Silicone Gasket Maker	.5 ml	8	51002	C5-A [®] Copper Based Anti-Seize	4 oz.	26	51831	Flange Sealant 518 Gasket Eliminator [®]	50 ml	8,9	81252	Solvo-Rust [™] Super Penetrating Oil	13 oz. aerosol	24
34026	Marine Grade Anti-Seize	1 lb.	27	51003	C5-A [®] Copper Based Anti-Seize	12 oz. aerosol	26	54531	Thread Sealant 545 Hydraulic/Pneumatic Sealant	50 ml	7	81716	Paint Stripper	18 oz. aerosol	30
34395	Marine Grade Anti-Seize	8 oz.	27	51004	C5-A [®] Copper Based Anti-Seize	13 oz. cartridge	26	54541	Thread Sealant 545 Hydraulic/Pneumatic Sealant	250 ml	7	82039	Cold Galvanizing Compound	15 oz. aerosol	29
34517	White High Temp Anti-Seize	8 oz.	26	51005	C5-A [®] Copper Based Anti-Seize	10 oz.	26	56531	Thread Sealant 565 PST [®] Controlled Strength	50 ml	7	82046	5920 RTV Copper Silicone Gasket Maker	300 ml	8
34518	White High Temp Anti-Seize	1 lb.	26	51006	C5-A [®] Copper Based Anti-Seize	1 lb.	26	56541	Thread Sealant 565 PST [®] Controlled Strength	250 ml	7	82093	Fixmaster [®] Underwater Repair Epoxy	4 oz.	12
34663	Chisel [®] MC-Free Gasket Remover	15.25 oz. aerosol	30	51007	C5-A [®] Copper Based Anti-Seize	1 lb.	26	56707	Thread Sealant 567 PST [®] High Temperature	6 ml	7	82244	Natural Blue [®] Cleaner & Degreaser	4 fl. oz.	31
34894	Color Guard [®] Black Tough Rubber Coating	11 oz. aerosol	29	51008	C5-A [®] Copper Based Anti-Seize	2.5 lb.	26	56747	Thread Sealant 567 PST [®] High Temperature	50 ml	7	82249	Natural Blue [®] Cleaner & Degreaser	24 fl. oz.	31
34895	Color Guard [®] Blue Tough Rubber Coating	11 oz. aerosol	29	51009	C5-A [®] Copper Based Anti-Seize	8 lb.	26	56765	Thread Sealant 567 PST [®] High Temperature	250 ml	7	82251	Natural Blue [®] Cleaner & Degreaser	1 gal.	31
34896	Color Guard [®] Red Tough Rubber Coating	11 oz. aerosol	29	51010	C5-A [®] Copper Based Anti-Seize	25 lb.	26	58730	587 RTV Blue Silicone Gasket Maker	70 ml	9	82253	Natural Blue [®] Cleaner & Degreaser	5 gal.	31
34897	Color Guard [®] Yellow Tough Rubber Coating	11 oz. aerosol	29	51011	C5-A [®] Copper Based Anti-Seize	42 lb.	26	58775	587 RTV Blue Silicone Gasket Maker	300 ml	9	82254	Natural Blue [®] Cleaner & Degreaser	15 gal.	31
34943	Industrial Hand Wipes	75 count	32	51031	Flange Sealant 510 Gasket Eliminator [®]	50 ml	9	58791	587 RTV Blue Silicone Gasket Maker	17 liters	9	82255	Natural Blue [®] Cleaner & Degreaser	55 gal.	31
34944	Industrial Hand Wipes	130 count	32	51041	Flange Sealant 510 Gasket Eliminator [®]	250 ml	9	59330	Superflex [™] Black RTV Silicone Adhesive Sealant	80 ml	8	82279	Superflex [™] Red High Temp RTV Silicone Adhesive Sealant	12 oz.	9
34979	Color Guard [®] Black Tough Rubber Coating	14.5 fl. oz.	29	51048	Moly Paste	8 oz.	26	59375	Superflex [™] Black RTV Silicone Adhesive Sealant	300 ml	8	82480	H.V.A.C. Blue Pipe Joint Compound	.25 pt.	6
34980	Color Guard [®] Black Tough Rubber Coating	1 gal.	29	51049	Moly Paste	1 lb.	26	59430	Superflex [™] White RTV Silicone Adhesive Sealant	80 ml	8	82481	H.V.A.C. Blue Pipe Joint Compound	1 pt.	6
34982	Color Guard [®] Blue Tough Rubber Coating	14.5 fl. oz.	29	51050	Moly Paste	12 oz. aerosol	26	59475	Superflex [™] White RTV Silicone Adhesive Sealant	300 ml	8	82518	Superflex [™] White RTV Silicone Adhesive Sealant	7.25 oz.	8
34983	Color Guard [®] Blue Tough Rubber Coating	1 gal.	29	51084	Graphite - 50 Anti-Seize	1 lb.	26	59530	Superflex [™] Clear RTV Silicone Adhesive Sealant	80 ml	8	90123	Hand Cleaner Dispensers and Accessories - Stainless Steel Pump		32
34985	Color Guard [®] Red Tough Rubber Coating	14.5 fl. oz.	29	51094	Moly - 50 Anti-Seize	1 lb.	26	59575	Superflex [™] Clear RTV Silicone Adhesive Sealant	300 ml	8	90126	Hand Cleaner Dispensers and Accessories - Plastic Pump		32
34986	Color Guard [®] Red Tough Rubber Coating	1 gal.	29	51102	Nickel Anti-Seize	1 lb.	26	59630	Superflex [™] Red High Temp RTV Silicone Adhesive Sealant	80 ml	9	90128	Hand Cleaner Dispensers and Accessories - Wall Bracket		32
34988	Color Guard [®] Yellow Tough Rubber Coating	14.5 fl. oz.	29	51115	N-1000 High Purity Anti-Seize	8 oz.	26	59675	Superflex [™] Red High Temp RTV Silicone Adhesive Sealant	300 ml	9	94142	Big Foot [™] Primer / Sealer	1 gal.	18
34989	Color Guard [®] Yellow Tough Rubber Coating	1 gal.	29	51116	N-1000 High Purity Anti-Seize	1 lb.	26	59830	598 RTV Black Silicone Gasket Maker	70 ml	8	95140	Hand Cleaner Dispensers and Accessories - Push type, wall mounted		32
34994	Primer for Color Guard [®] Tough Rubber Coating	1 gal.	28	51117	N-1000 High Purity Anti-Seize	2 lb.	26	59866	598 RTV Black Silicone Gasket Maker	8.75 oz.	8	95551	Fixmaster [®] Magna-Crete [®]	1 gal.	17
34995	Thinner for Color Guard [®] Tough Rubber Coating	1 gal.	28	51144	C5-A [®] Copper Based Anti-Seize	4 oz.	26	59875	598 RTV Black Silicone Gasket Maker	300 ml	8	95555	Fixmaster [®] Magna-Crete [®]	5 gal.	17
35082	55 Pipe Sealing Cord	5,700 in.	6	51145	Moly Paste	15 lb.	26	59891	598 RTV Black Silicone Gasket Maker	49 lb.	8	95581	Big Foot [™] Acrylic Primer	1 gal.	18
35406	Orange Cream Hand Cleaner (Fine Pumice Formula)	4.5 lb.	33	51146	C5-A [®] Copper Based Anti-Seize	425 lb.	26	60921	Retaining Compound 609 General Purpose	10 ml	11	95591	Big Foot [™] Acrylic Pedestrian Grade, Grey	1 gal.	19
36045	Big Foot [™] Acrylic Pedestrian Grade, Black	1 gal.	19	51147	C5-A [®] Copper Based Anti-Seize	8 oz.	26	60931	Retaining Compound 609 General Purpose	50 ml	11	95631	Big Foot [™] Low Profile Pedestrian Grade, Black	1 gal.	19
36132	Urethane Sealant - black	10.2 oz.	16	51152	Nickel Anti-Seize	8 lb.	26	60941	Retaining Compound 609 General Purpose	250 ml	11	95641	Big Foot [™] Low Profile Pedestrian Grade, Grey	1 gal.	19
36334	Fixmaster [®] Magna-Crete [®] Activator	10 lb.	16	51168	Food Grade Anti-Seize	8 oz.	27	62015	Retaining Compound 620 High Temperature	10 ml	11	96092	Nordbak [®] Chemical Resistant Coating	12 lb.	14, 16
36354	Heavy Duty Anti-Seize	8 lb.	25	51170	Food Grade Anti-Seize	2 lb.	27	62040	Retaining Compound 620 High Temperature	50 ml	11	96102	Fixmaster [®] Marine Chocking, Orange	2 gal.	20
36780	ViperLube [™] High Performance Synthetic Grease	1 oz.	25	51171	Food Grade Anti-Seize	40 lb.	27	62070	Retaining Compound 620 High Temperature	250 ml	11	96121	Big Foot [™] Phenolic Roller Cores	4 pcs./case	38
36781	ViperLube [™] High Performance Synthetic Grease	3 oz.	25	51211	Maxi-Coat	12 oz. aerosol	29	65116	Paint & Resin Removing Hand Cleaner with Fine Pumice	15 fl. oz.	32	96131	Mixer Blades	1 pc.	38
36782	ViperLube [™] High Performance Synthetic Grease	14 oz.	25	51213	Maxi-Coat	1 gal.	29	65218	Paint & Resin Removing Hand Cleaner with Fine Pumice	1 gal.	32	96132	Big Foot [™] Metal Primer	1 gal.	18
36783	ViperLube [™] High Performance Synthetic Grease	400 g	25	51221	Penetrating Oil	12 oz. aerosol	24	66010	Retaining Compound 660 Quick Metal [®] Press Fit Repair	6 ml	10	96153	Big Foot [™] Bristle Rollers	2 pcs./case	38
36784	ViperLube [™] High Performance Synthetic Grease	.42 oz.	25	51242	Extreme Pressure Grease	14.5 oz.	24	66040	Retaining Compound 660 Quick Metal [®] Press Fit Repair	50 ml	10	96211	Big Foot [™] Heavy Duty Pedestrian Grade, Black	1 gal.	19
36786	ViperLube [™] High Performance Synthetic Grease	11 oz. aerosol	25	51243	N-5000 High Purity Anti-Seize	8 oz.	26	68015	Retaining Compound 680 High Strength/High Viscosity	10 ml	11	96215	Big Foot [™] Heavy Duty Pedestrian Grade, Black	5 gal.	19
36787	ViperLube [™] High Performance Synthetic Gear Oil	1 gal.	25	51245	N-5000 High Purity Anti-Seize	8 lb.	26	68035	Retaining Compound 680 High Strength/High Viscosity	50 ml	11	96221	Big Foot [™] Vehicular Grade, Black	1 gal.	18
36788	ViperLube [™] High Performance Synthetic Lightweight Oil	1 gal.	25	51246	N-5000 High Purity Anti-Seize	2 lb.	26	68060	Retaining Compound 680 High Strength/High Viscosity	250 ml	11	96225	Big Foot [™] Vehicular Grade, Black	5 gal.	18
37061	ViperLube [™] High Performance Synthetic Grease	5 gal.	25	51252	Food Grade Grease	14.5 oz.	24	75430	Extend [®] Rust Treatment	1 qt.	28	96231	Big Foot [™] Zero V.O.C., Black	1 gal.	18
38050	Black Max [®] 380 Toughened Instant Adhesive	1 oz.	35	51269	N-5000 High Purity Anti-Seize	1 lb.	26	75448	Extend [®] Rust Treatment	1 gal.	28	96235	Big Foot [™] Zero V.O.C., Black	5 gal.	18
39633	Fixmaster [®] Rapid Rubber Repair Static Mixers	6 nozzles	38	51270	Metal Free N-7000 High Purity Anti-Seize	1 lb.	26	75465	Extend [®] Rust Treatment	5 gal.	28	96245	Big Foot [™] Zero V.O.C., Grey	5 gal.	18
39635	Fixmaster [®] Rapid Rubber Repair Gun		22, 38	51270	N-7000 Metal Free Anti-Seize	1 lb.	26	76732	Silver Grade Anti-Seize	8 oz.	26	96251	Big Foot [™] Vehicular Grade, Grey	1 gal.	18
39636	Fixmaster [®] Flex Cleaner	4 fl. oz.	22	51272	Metal Free N-7000 High Purity Anti-Seize	8 oz.	26	76759	Silver Grade Anti-Seize	12 oz. aerosol	26	96255	Big Foot [™] Vehicular Grade, Grey	5 gal.	18
39637	Fixmaster [®] Fast Set Grout	2 gal.	21	51272	N-7000 Metal Free Anti-Seize	8 oz.	26	76764	Silver Grade Anti-Seize	1 lb.	26	96261	Big Foot [™] Heavy Duty Pedestrian Grade, Grey	1 gal.	19
39643	C5-A [®] Copper Based Anti-Seize	1 lb.	26	51273	Metal Free N-7000 High Purity Anti-Seize	2 lb.	26	76775	Silver Grade Anti-Seize	5 gal.	26	96265	Big Foot [™] Heavy Duty Pedestrian Grade, Grey	5 gal.	19
39647	C5-A [®] Copper Based Anti-Seize	8 oz.	26	51273	N-7000 Metal Free Anti-Seize	2 lb.	26	77124	Nickel Anti-Seize	8 oz.	26	96303	Nordbak [®] Combo Bead Wearing Compound	6 lb.	15
39895	Moly Dry Film	12 oz. aerosol	24	51277	C5-A [®] Copper Based Anti-Seize	7 g	26	77164	Nickel Anti-Seize	1 lb.	26	96321	Pipe Repair Kit, 2" x 6' Tape		37
39896	Moly Dry Film	1.3 lb.	24	51286	Nickel Anti-Seize	12 oz. aerosol	26	77175	Nickel Anti-Seize	5 gal.	26	96322	Pipe Repair Kit, 4" x 12' Tape		37

Product Ordering Information



■ Search by Loctite Product name on these pages.

Part Number	Product Name	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page
96332	Nordbak® Ultra High Temperature Pneu-Wear	25 lb.	14	55 Pipe Sealing Cord	35082	5,700 in.	6	C5-A® Copper Based Anti-Seize	51147	8 oz.	26	Fixmaster® High Performance Quartz	96495	42 lb.	16
96363	Nordbak® Fast Cure Pneu-Wear	6 lb.	14	5699 RTV Grey Silicone Gasket Maker	18581	300 ml	8	C5-A® Copper Based Anti-Seize	51277	7 g	26	Fixmaster® Instant Belt Repair	97033	1 lb.	22
96373	Nordbak® Fast Cure Wearing Compound	6 lb.	14	5699 RTV Grey Silicone Gasket Maker	18718	70 ml	8	C5-A® Copper Based Anti-Seize	51299	2 g	26	Fixmaster® Magna-Crete®	95551	1 gal.	17
96392	Nordbak® Ultra High Temperature Wearing Compound	25 lb.	14	587 RTV Blue Silicone Gasket Maker	30567	8.75 oz.	9	Chisel® MC-Free Gasket Remover	34663	15.25 oz. aerosol	30	Fixmaster® Magna-Crete®	95555	5 gal.	17
96433	Nordbak® High Temperature Brushable Ceramic	2 lb.	14	587 RTV Blue Silicone Gasket Maker	58730	70 ml	9	Chisel® Gasket Remover (Methylene Chloride)	79040	18 oz.	8, 30	Fixmaster® Magna-Crete® Activator	36334	10 lb.	16
96443	Nordbak® Brushable Ceramic - White	2 lb.	15	587 RTV Blue Silicone Gasket Maker	58775	300 ml	9	Cold Galvanizing Compound	82039	15 oz. aerosol	29	Fixmaster® Marine Chocking, Green	97572	2 gal.	20
96495	Fixmaster® High Performance Quartz	42 lb.	16	587 RTV Blue Silicone Gasket Maker	58791	17 liters	9	Color Guard® Black Tough Rubber Coating	34894	11 oz. aerosol	29	Fixmaster® Marine Chocking, Orange	96102	2 gal.	20
96583	Fixmaster® Wet Surface Repair Putty	1 lb.	12	5920 RTV Copper Silicone Gasket Maker	30542	70 ml	8	Color Guard® Black Tough Rubber Coating	34979	14.5 fl. oz.	29	Fixmaster® Metal Magic Steel™	98853	4 oz.	13
96604	Fixmaster® Fast Set Steel Epoxy	50 ml	12	5920 RTV Copper Silicone Gasket Maker	82046	300 ml	8	Color Guard® Black Tough Rubber Coating	34980	1 gal.	29	Fixmaster® Rapid Rubber Repair Gun	39635		22, 38
96675	Fixmaster® Rapid Rubber Repair Urethane	400 ml cartridge	23	598 RTV Black Silicone Gasket Maker	34018	.5 ml	8	Color Guard® Blue Tough Rubber Coating	34895	11 oz. aerosol	29	Fixmaster® Rapid Rubber Repair Static Mixers	39633	6 nozzles	38
96676	Fixmaster® Rapid Rubber Repair Urethane	150 ml	23	598 RTV Black Silicone Gasket Maker	59830	70 ml	8	Color Guard® Blue Tough Rubber Coating	34982	14.5 fl. oz.	29	Fixmaster® Rapid Rubber Repair Urethane	96675	400 ml cartridge	23
96677	Fixmaster® Rapid Rubber Repair Urethane Kit	400 ml kit	23, 37	598 RTV Black Silicone Gasket Maker	59866	8.75 oz.	8	Color Guard® Blue Tough Rubber Coating	34983	1 gal.	29	Fixmaster® Rapid Rubber Repair Urethane	96676	150 ml	23
97001	Peristaltic Hand Pump		38	598 RTV Black Silicone Gasket Maker	59875	300 ml	8	Color Guard® Red Tough Rubber Coating	34896	11 oz. aerosol	29	Fixmaster® Rapid Rubber Repair Urethane Kit	96677	400 ml kit	23, 37
97033	Fixmaster® Instant Belt Repair	1 lb.	22	598 RTV Black Silicone Gasket Maker	59891	49 lb.	8	Color Guard® Red Tough Rubber Coating	34985	14.5 fl. oz.	29	Fixmaster® Stainless Steel Putty	97443	1 lb.	12
97273	Fixmaster® Flex Accelerator	3.5 fl. oz.	22	All Purpose Spray Adhesive	30544	10.5 oz.	34	Color Guard® Red Tough Rubber Coating	34986	1 gal.	29	Fixmaster® Steel Liquid	97482	16 lb.	12
97401	Fixmaster® Flex Brushable	1 lb.	15	Aqua Power™ Cleaner & Degreaser	30565	17 oz. aerosol	31	Color Guard® Yellow Tough Rubber Coating	34897	11 oz. aerosol	29	Fixmaster® Steel Liquid	97483	1 lb.	12
97412	Fixmaster® Flex 80 Liquid	6 lb.	17	Aviation Gasket Sealant	30516	1 pt.	8	Color Guard® Yellow Tough Rubber Coating	34988	14.5 fl. oz.	29	Fixmaster® Steel Liquid	97484	4 lb.	12
97413	Fixmaster® Flex 80 Liquid	1 lb.	17	Aviation Gasket Sealant	30517	0.25 pt.	8	Color Guard® Yellow Tough Rubber Coating	34989	1 gal.	29	Fixmaster® Steel Putty	99912	25 lb.	12
97422	Fixmaster® Flex 80 Putty	6 lb.	15	Belt Dressing & Conditioner	30527	12 oz. aerosol	28	Contact Adhesive	30537	5 fl. oz.	34	Fixmaster® Steel Putty	99913	1 lb.	12
97423	Fixmaster® Flex 80 Putty	1 lb.	15	Big Foot™ Acrylic Pedestrian Grade, Black	36045	1 gal.	19	Depend® 330 No-Mix Adhesive	33058	250 ml	35	Fixmaster® Steel Putty	99914	4 lb.	12
97434	Fixmaster® 4 Minute Epoxy	50 ml	34	Big Foot™ Acrylic Pedestrian Grade, Grey	95591	1 gal.	19	Depend® 330 No-Mix Adhesive	33064	300 ml	35	Fixmaster® Super Grout	33510	5 gal.	21
97443	Fixmaster® Stainless Steel Putty	1 lb.	12	Big Foot™ Acrylic Primer	95581	1 gal.	18	Depend® 330 No-Mix Adhesive Kit	20251	25 ml	35	Fixmaster® Superior Metal Putty	97473	1 lb.	13
97453	Fixmaster® Aluminum Liquid	1 lb.	13	Big Foot™ Bristle Rollers	96153	2 pcs./case	38	Depend® 330 No-Mix Adhesive Kit	20252	250 ml	35	Fixmaster® Underwater Repair Epoxy	82093	4 oz.	12
97463	Fixmaster® Aluminum Putty	1 lb.	13	Big Foot™ Heavy Duty Pedestrian Grade, Black	96211	1 gal.	19	Dielectric Grease	30536	0.33 oz.	24	Fixmaster® Wet Surface Repair Putty	96583	1 lb.	12
97473	Fixmaster® Superior Metal Putty	1 lb.	13	Big Foot™ Heavy Duty Pedestrian Grade, Black	96215	5 gal.	19	Dual Cartridge Applicator	983531		38	Flange Sealant 510 Gasket Eliminator®	51031	50 ml	9
97482	Fixmaster® Steel Liquid	16 lb.	12	Big Foot™ Heavy Duty Pedestrian Grade, Black	96215	5 gal.	19	Electrical Contact & Parts Cleaner	25791	11 oz. aerosol	30	Flange Sealant 510 Gasket Eliminator®	51041	250 ml	9
97483	Fixmaster® Steel Liquid	1 lb.	12	Big Foot™ Heavy Duty Pedestrian Grade, Grey	96261	1 gal.	19	Extend® Rust Treatment	30539	10.5 oz. aerosol	28	Flange Sealant 518 Gasket Eliminator®	51817	6 ml	8,9
97484	Fixmaster® Steel Liquid	4 lb.	12	Big Foot™ Heavy Duty Pedestrian Grade, Grey	96265	5 gal.	19	Extend® Rust Treatment	75430	1 qt.	28	Flange Sealant 518 Gasket Eliminator®	51831	50 ml	8,9
97572	Fixmaster® Marine Chocking, Green	2 gal.	20	Big Foot™ Low Profile Pedestrian Grade, Black	95631	1 gal.	19	Extend® Rust Treatment	75448	1 gal.	28	Food Grade Anti-Seize	51168	8 oz.	25
97762	Nordbak® Ceramic Tile Adhesive	20 lb.	14	Big Foot™ Low Profile Pedestrian Grade, Grey	95641	1 gal.	19	Extend® Rust Treatment	75448	1 gal.	28	Food Grade Anti-Seize	51170	2 lb.	25
98372	Nordbak® High Temperature Pneu-Wear	25 lb.	14	Big Foot™ Metal Primer	96132	1 gal.	18	Extend® Rust Treatment	75465	5 gal.	28	Food Grade Anti-Seize	51171	40 lb.	25
98382	Nordbak® Pneu-Wear	25 lb.	15	Big Foot™ Phenolic Roller Cores	96121	4 pcs./case	38	Extreme Pressure Grease	51242	14.5 oz.	24	Food Grade Anti-Seize	51171	40 lb.	25
98383	Nordbak® Pneu-Wear	3 lb.	15	Big Foot™ Primer / Sealer	94142	1 gal.	18	Fixmaster® 4 Minute Epoxy	97434	50 ml	34	Food Grade Grease	51252	14.5 oz.	26
98468	Fixmaster® Flex Rubber Primer	2.4 fl. oz.	22	Big Foot™ Vehicular Grade, Black	96221	1 gal.	18	Fixmaster® Aluminum Liquid	97453	1 lb.	13	Form-A-Thread® Stripped Thread Repair Kit	28654	4.8 ml	37
98471	Fixmaster® Flex Metal Primer	3.3 fl. oz.	14	Big Foot™ Vehicular Grade, Black	96225	5 gal.	18	Fixmaster® Aluminum Putty	97463	1 lb.	13	Fragrance-Free Natural Blue® Cleaner & Degreaser	20279	55 gal.	31
98693	Fixmaster® Flex Conveyor Belt Repair Kit	1 lb.	23	Big Foot™ Vehicular Grade, Grey	96251	1 gal.	18	Fixmaster® Deep Pour Grout	99545	5 gal.	21	Fragrance-Free Natural Blue® Cleaner & Degreaser	23811	1 gal.	31
98732	Nordbak® Brushable Ceramic - Grey	6 lb.	15	Big Foot™ Vehicular Grade, Grey	96255	5 gal.	18	Fixmaster® Etching Agent	99626	3 fl. oz.	22	Gasket Sealant #1	30510	1.5 oz.	8
98733	Nordbak® Brushable Ceramic - Grey	2 lb.	15	Big Foot™ Vehicular Grade, Tile Red	33957	5 gal.	18	Fixmaster® Fast Cure Epoxy Mixer Cups	21425	10 - .2 fl. oz. cups	34	Gasket Sealant #1	30511	3 oz.	8
98853	Fixmaster® Metal Magic Steel™	4 oz.	13	Big Foot™ Zero V.O.C. Grey	39915	1 gal.	18	Fixmaster® Fast Cure Epoxy Mixer Cups	21426	10 - 1 oz. cups	34	Gasket Sealant #1	30512	11 oz.	8
98992	Nordbak® Castable Wearing Compound	25 lb.	14	Big Foot™ Zero V.O.C., Black	96231	1 gal.	18	Fixmaster® Fast Cure Epoxy Mixer Cups	21426	10 - 1 oz. cups	34	Gasket Sealant #2	30513	1.5 oz.	8
99112	Nordbak® High Temperature Wearing Compound	25 lb.	14	Big Foot™ Zero V.O.C., Black	96235	5 gal.	18	Fixmaster® Fast Cure Epoxy Mixer Cups	21426	10 - 1 oz. cups	34	Gasket Sealant #2	30514	3 oz.	8
99361	Fixmaster® Floor Fill	10 lb.	17	Big Foot™ Zero V.O.C., Grey	96245	5 gal.	18	Fixmaster® Fast Set Grout	39637	2 gal.	21	Gasket Sealant #2	30515	11 oz.	8
99365	Fixmaster® Floor Fill	40 lb.	17	Black Contact Adhesive	30540	5 fl. oz.	34	Fixmaster® Fast Set Steel Epoxy	96604	50 ml	12	Gasket Sealant #2	30515	11 oz.	8
99392	Fixmaster® High Performance Epoxy	2 gal.	34	Black Max® 380 Toughened Instant Adhesive	38050	1 oz.	35	Fixmaster® Fast Set Steel Epoxy	39917	1 lb.	12	Gasket Sealant #2	80964	5 gal.	8
99393	Fixmaster® High Performance Epoxy	1 oz.	34	C5-A® Copper Based Anti-Seize	39643	1 lb.	26	Fixmaster® Flex 80 Liquid	97412	6 lb.	17	Gear, Chain and Cable Lubricant	81251	12 oz. aerosol	24
99394	Fixmaster® High Performance Epoxy	50 ml	34	C5-A® Copper Based Anti-Seize	39647	8 oz.	26	Fixmaster® Flex 80 Liquid	97413	1 lb.	17	Graphite - 50 Anti-Seize	51084	1 lb.	26
99545	Fixmaster® Deep Pour Grout	5 gal.	21	C5-A® Copper Based Anti-Seize	51001	1 oz.	26	Fixmaster® Flex 80 Putty	97422	6 lb.	15	H.V.A.C. Blue Pipe Joint Compound	82480	.25 pt.	6
99626	Fixmaster® Etching Agent	3 fl. oz.	22	C5-A® Copper Based Anti-Seize	51002	4 oz.	26	Fixmaster® Flex 80 Putty	97423	1 lb.	15	H.V.A.C. Blue Pipe Joint Compound	82481	1 pt.	6
99812	Nordbak® Wearing Compound	25 lb.	14	C5-A® Copper Based Anti-Seize	51003	12 oz. aerosol	26	Fixmaster® Flex Accelerator	97273	3.5 fl. oz.	22	Hand Cleaner Dispensers and Accessories - Plastic Pump	90126		32
99813	Nordbak® Wearing Compound	5 lb.	14	C5-A® Copper Based Anti-Seize	51004	13 oz. cartridge	26	Fixmaster® Flex Brushable	97401	1 lb.	15	Hand Cleaner Dispensers and Accessories - Push type, wall mounted	95140		32
99912	Fixmaster® Steel Putty	25 lb.	12	C5-A® Copper Based Anti-Seize	51005	10 oz.	26	Fixmaster® Flex Cleaner	39636	4 fl. oz.	22	Hand Cleaner Dispensers and Accessories - Stainless Steel Pump	90123		32
99913	Fixmaster® Steel Putty	1 lb.	12	C5-A® Copper Based Anti-Seize	51006	1 lb.	26	Fixmaster® Flex Conveyor Belt Repair Kit	98693	1 lb.	23	Hand Cleaner Dispensers and Accessories - Wall Bracket	90128		32
99914	Fixmaster® Steel Putty	4 lb.	12	C5-A® Copper Based Anti-Seize	51007	1 lb.	26	Fixmaster® Flex Metal Primer	98471	3.3 fl. oz.	14	Heavy Duty Anti-Seize	36354	8 lb.	27
983531	Dual Cartridge Applicator	38		C5-A® Copper Based Anti-Seize	51008	2.5 lb.	26	Fixmaster® Flex Rubber Primer	98468	2.4 fl. oz.	22	Heavy Duty Anti-Seize	51605	9 oz.	27
				C5-A® Copper Based Anti-Seize	51009	8 lb.	26	Fixmaster® Floor Filler	99361	10 lb.	17	Heavy Duty Anti-Seize	51606	1.2 lb.	27
				C5-A® Copper Based Anti-Seize	51010	25 lb.	26	Fixmaster® Floor Fill	99365	40 lb.	17	Heavy Duty Anti-Seize	51607	2.3 lb.	27
				C5-A® Copper Based Anti-Seize	51011	42 lb.	26	Fixmaster® General Purpose Epoxy Mixer Cups	21427	10 - .12 fl. oz. cups	34	Heavy Duty Anti-Seize	51608	45 lb.	27
				C5-A® Copper Based Anti-Seize	51144	4 oz.	26	Fixmaster® High Performance Epoxy	99392	2 gal.	34	Heavy Duty Anti-Seize	51609	1 oz.	27
				C5-A® Copper Based Anti-Seize	51146	425 lb.	26	Fixmaster® High Performance Epoxy	99393	1 oz.	34	Heavy Duty Pumice Lotion Hand Cleaner	21116	15 fl. oz.	33
				C5-A® Copper Based Anti-Seize	51146	425 lb.	26	Fixmaster® High Performance Epoxy	99394	50 ml	34	Heavy Duty Pumice Lotion Hand Cleaner	21218	1 gal.	33

Product Ordering Information



Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page	Product Name	Part Number	Pack-Size	Page
High Performance N-5000 High Purity Anti-Seize (max lubrication)	51572	1 lb.	26	Nickel Anti-Seize	51152	8 lb.	26	Prism® 454 Surface Insensitive Instant Adhesive Gel	45440	20 g	35	Thread Sealant 564 Lower Strength	28755	250 ml	6
Hi-Tack Gasket Sealant	30524	.25 pt.	8	Nickel Anti-Seize	51286	12 oz. aerosol	26	Pro Strength Degreaser	30521	15 oz. aerosol	31	Thread Sealant 565 PST® Controlled Strength	56531	50 ml	7
Hi-Tack Gasket Sealant	30525	1 pt.	8	Nickel Anti-Seize	77124	8 oz.	26	Pro Strength Parts Cleaner	30548	19 oz. aerosol	31	Thread Sealant 565 PST® Controlled Strength	56541	250 ml	7
Hi-Tack Gasket Sealant	30526	9 oz.	8	Nickel Anti-Seize	77164	1 lb.	26	Pro Strength Varnish Remover	30529	12 oz. aerosol	30	Thread Sealant 567 PST® High Temperature	33241	16 oz.	7
Hydraulic Jack Oil	30522	1 qt.	24	Nickel Anti-Seize	77175	5 gal.	26	Quick Service Tool Kit	00101		36	Thread Sealant 567 PST® High Temperature	56707	6 ml	7
Hydraulic Jack Oil	30523	1 gal.	24	No More Leaks™ Plastic Pipe Sealant	80724	7 fl. oz.	7	Quick Set™ 404 Instant Adhesive	46548	4 oz.	35	Thread Sealant 567 PST® High Temperature	56747	50 ml	7
Industrial Hand Wipes	34943	75 count	32	No More Leaks™ Plastic Pipe Sealant	80725	2 fl. oz.	7	Quick Set™ 404 Instant Adhesive	46551	1/3 o.z.	35	Thread Sealant 567 PST® High Temperature	56765	250 ml	7
Industrial Hand Wipes	34944	130 count	32	No More Leaks™ Plastic Pipe Sealant	80726	1 pt.	7	Reliability Tool Box	31362		36	Thread Sealant with Teflon®	30534	.25 pt.	6
Instant Gasket	30507	7 oz.	9	Non-Chlorinated Parts Cleaner	30545	14.75 oz. aerosol	30	Retaining Compound 603 Oil Tolerant	21440	10 ml	11	Thread Sealant with Teflon®	30561	1 pt.	6
Instant Gasket	30509	5 oz.	9	Non-Flammable Electrical Contact Cleaner	24379	15 oz. aerosol	30	Retaining Compound 603 Oil Tolerant	21441	50 ml	11	Threadlocker 220 Medium Strength/Wicking	22041	250 ml	4
Instant Gasket	30684	4 oz.	9	Nordbak® Brushable Ceramic - Grey	98732	6 lb.	15	Retaining Compound 603 Oil Tolerant	21442	250 ml	11	Threadlocker 222MS Low Strength/Small Screw	22221	10 ml	5
Krytox® RFE Advanced PTFE Dry Lubricant	30138	8 oz. aerosol	24	Nordbak® Brushable Ceramic - Grey	98733	2 lb.	15	Retaining Compound 609 General Purpose	60921	10 ml	11	Threadlocker 222MS Low Strength/Small Screw	22231	50 ml	5
Krytox® RFE Bearing Lubricant CP	31360	16 lb.	25	Nordbak® Brushable Ceramic - White	96443	2 lb.	15	Retaining Compound 609 General Purpose	60931	50 ml	11	Threadlocker 222MS Low Strength/Small Screw	22241	250 ml	5
Krytox® RFE Bearing Lubricant CP	31361	16 oz.	25	Nordbak® Castable Wearing Compound	98992	25 lb.	14	Retaining Compound 609 General Purpose	60941	250 ml	11	Threadlocker 242® Removable	24221	10 ml	5
Krytox® RFE Cleaner	30615	10 oz. aerosol	24	Nordbak® Ceramic Tile Adhesive	97762	20 lb.	14	Retaining Compound 620 High Temperature	62015	10 ml	11	Threadlocker 242® Removable	24231	50 ml	5
Krytox® RFE PFPE Bearing Lubricant	29709	16 oz.	25	Nordbak® Chemical Resistant Coating	96092	12 lb.	14, 16	Retaining Compound 620 High Temperature	62040	50 ml	11	Threadlocker 242® Removable	24241	250 ml	5
Krytox® RFE PFPE High Performance Lubricant	29711	2 oz.	25	Nordbak® Combo Bead Wearing Compound	96303	6 lb.	15	Retaining Compound 620 High Temperature	62070	250 ml	11	Threadlocker 243 Oil Resistant/Medium Strength	24077	10 ml	5
Krytox® RFE PFPE O-Ring Lubricant	29710	2 oz.	24	Nordbak® Fast Cure Pneu-Wear	96363	6 lb.	14	Retaining Compound 660 Quick Metal® Press Fit Repair	30287	250 ml	10	Threadlocker 243 Oil Resistant/Medium Strength	24078	50 ml	5
Krytox® RFE Synthetic PFPE Lubricating Oil	30394	8 oz. aerosol	24	Nordbak® Fast Cure Wearing Compound	96373	6 lb.	14	Retaining Compound 660 Quick Metal® Press Fit Repair	66010	6 ml	10	Threadlocker 243 Oil Resistant/Medium Strength	24079	250 ml	5
Maintain™ Lubricant, Moisture Displacer & Rust Preventer	81204	16 oz. aerosol	24	Nordbak® High Impact Wearing Compound	39918	25 lb.	14	Retaining Compound 660 Quick Metal® Press Fit Repair	66040	50 ml	10	Threadlocker 2440 Primerless/Medium Strength	33946	10 ml	4
Maintenance Tackle Box	33486		36	Nordbak® High Temperature Brushable Ceramic	96433	2 lb.	14	Retaining Compound 680 High Strength/High Viscosity	68015	10 ml	11	Threadlocker 2440 Primerless/Medium Strength	33947	50 ml	4
Marine Grade Anti-Seize	34026	1 lb.	27	Nordbak® High Temperature Pneu-Wear	98372	25 lb.	14	Retaining Compound 680 High Strength/High Viscosity	68035	50 ml	11	Threadlocker 2440 Primerless/Medium Strength	33948	250 ml	4
Marine Grade Anti-Seize	34395	8 oz.	27	Nordbak® High Temperature Wearing Compound	99112	25 lb.	14	Retaining Compound 680 High Strength/High Viscosity	68060	250 ml	11	Threadlocker 262 Permanent	26221	10 ml	5
Max Strength Spray Adhesive	30568	16.75 oz.	34	Nordbak® Pneu-Wear	98382	25 lb.	15	Rubberized Undercoating	30538	16 oz. aerosol	29	Threadlocker 262 Permanent	26231	50 ml	5
Maxi-Coat	51211	12 oz. aerosol	29	Nordbak® Pneu-Wear	98383	3 lb.	15	Silicone Lubricant	51360	5.3 oz.	24	Threadlocker 262 Permanent	26241	250 ml	5
Maxi-Coat	51213	1 gal.	29	Nordbak® Ultra High Temperature Pneu-Wear	96332	25 lb.	14	Silicone Lubricant	81246	13 oz. aerosol	24	Threadlocker 272 High Temp/High Strength	27240	50 ml	4
Metal Free N-7000 High Purity Anti-Seize	51270	1 lb.	26	Nordbak® Ultra High Temperature Wearing Compound	96392	25 lb.	14	Silver Grade Anti-Seize	76732	8 oz.	26	Threadlocker 272 High Temp/High Strength	27270	250 ml	4
Metal Free N-7000 High Purity Anti-Seize	51272	8 oz.	26	Nordbak® Wearing Compound	99812	25 lb.	14	Silver Grade Anti-Seize	76759	12 oz. aerosol	26	Threadlocker 2760 High Strength Primerless	32525	10 ml	4
Metal Free N-7000 High Purity Anti-Seize	51273	2 lb.	26	Nordbak® Wearing Compound	99813	5 lb.	14	Silver Grade Anti-Seize	76764	1 lb.	26	Threadlocker 2760 High Strength Primerless	32526	50 ml	4
Mixer Blades	96131	1 pc.	38	ODC-Free Cleaner & Degreaser	20162	16 fl. oz.	4, 6, 8, 31	Silver Grade Anti-Seize	76775	5 gal.	26	Threadlocker 2760 High Strength Primerless	32527	250 ml	4
Moly - 50 Anti-Seize	51094	1 lb.	26	ODC-Free Cleaner & Degreaser	22355	15 oz.	4, 6, 8, 31	Silver Grade Anti-Seize	80206	1 gal.	26	Threadlocker 277 High Strength/Large Threads	21434	10 ml	4
Moly Dry Film	39895	12 oz. aerosol	24	Orange Cream Hand Cleaner (Fine Pumice Formula)	35406	4.5 lb.	33	Silver Grade Anti-Seize	80209	4 oz.	26	Threadlocker 277 High Strength/Large Threads	27731	50 ml	4
Moly Dry Film	39896	1.3 lb.	24	Orange Cream Hand Cleaner (Smooth Formula)	33406	4.5 lb.	33	Solvo-Rust® Super Penetrating Oil	81252	13 oz. aerosol	24	Threadlocker 277 High Strength/Large Threads	27741	250 ml	4
Moly Dry Film	39897	10 lb.	24	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25104	1 gal. flat-top	33	Superflex® Black RTV Silicone Adhesive Sealant	30563	7.25 oz.	8	Threadlocker 290 Wicking Grade	29021	10 ml	4
Moly Dry Film	39898	50 lb.	24	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25108	7.5 fl. oz.	33	Superflex® Black RTV Silicone Adhesive Sealant	59330	80 ml	8	Threadlocker 290 Wicking Grade	29031	50 ml	4
Moly Paste	51048	8 oz.	26	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25116	15 fl. oz.	33	Superflex® Black RTV Silicone Adhesive Sealant	59375	300 ml	8	Threadlocker 290 Wicking Grade	29041	250 ml	4
Moly Paste	51049	1 lb.	26	Orange Lotion Hand Cleaner (Fine Pumice Formula)	25218	1 gal.	33	Superflex® Blue RTV Silicone Adhesive Sealant	30518	12 oz.	8	Urethane Sealant - black	36132	10.2 oz.	16
Moly Paste	51050	12 oz. aerosol	26	Orange Lotion Hand Cleaner (Smooth Formula)	23104	1 gal. flat-top	33	Superflex® Blue RTV Silicone Adhesive Sealant	30533	300 ml	8	Urethane Sealant - grey	39916	10.2 oz.	16
Moly Paste	51145	15 lb.	26	Orange Lotion Hand Cleaner (Smooth Formula)	23108	7.5 fl. oz.	33	Superflex® Blue RTV Silicone Adhesive Sealant	30541	7.25 oz.	8	ViperLube™ High Performance Synthetic Gear Oil	36787	1 gal.	25
Multi-Purpose Glass Cleaner	30546	18.75 oz. aerosol	30	Orange Lotion Hand Cleaner (Smooth Formula)	23116	15 fl. oz.	33	Superflex® Blue RTV Silicone Adhesive Sealant	30560	80 ml	8	ViperLube™ High Performance Synthetic Grease	36780	1 cc	25
N-1000 High Purity Anti-Seize	51115	8 oz.	26	Orange Lotion Hand Cleaner (Smooth Formula)	23218	1 gal.	33	Superflex® Clear RTV Silicone Adhesive Sealant	30562	7.25 oz.	8	ViperLube™ High Performance Synthetic Grease	36781	3 oz.	25
N-1000 High Purity Anti-Seize	51116	1 lb.	26	Original Cream Hand Cleaner	01013	14 oz.	32	Superflex® Clear RTV Silicone Adhesive Sealant	59530	80 ml	8	ViperLube™ High Performance Synthetic Grease	36782	14 oz.	25
N-1000 High Purity Anti-Seize	51117	2 lb.	26	Original Cream Hand Cleaner	01406	4.25 lb.	32	Superflex® Clear RTV Silicone Adhesive Sealant	59575	300 ml	8	ViperLube™ High Performance Synthetic Grease	36783	400 g	25
N-5000 High Purity Anti-Seize	51243	8 oz.	26	O-Ring Making Kit	00112		37	Superflex® Non-Corrosive RTV Silicone	51387	80 ml	8	ViperLube™ High Performance Synthetic Grease	36784	.42 oz.	25
N-5000 High Purity Anti-Seize	51245	8 lb.	26	Paint & Resin Removing Hand Cleaner with Fine Pumice	65116	15 fl. oz.	32	Superflex® Non-Corrosive RTV Silicone	51388	300 ml	8	ViperLube™ High Performance Synthetic Grease	36786	11 oz. aerosol	25
N-5000 High Purity Anti-Seize	51246	2 lb.	26	Paint & Resin Removing Hand Cleaner with Fine Pumice	65218	1 gal.	32	Superflex® Red High Temp RTV Silicone Adhesive Sealant	30564	7.25 oz.	9	ViperLube™ High Performance Synthetic Grease	37061	5 gal.	25
N-5000 High Purity Anti-Seize	51269	1 lb.	26	Paint Stripper	81716	18 oz. aerosol	30	Superflex® Red High Temp RTV Silicone Adhesive Sealant	59630	80 ml	9	ViperLube™ High Performance Synthetic Lightweight Oil	36788	1 gal.	25
N-5000 High Purity Anti-Seize	51346	1 oz.	26	Penetrating Oil	51221	12 oz. aerosol	24	Superflex® Red High Temp RTV Silicone Adhesive Sealant	59675	300 ml	9	White High Temp Anti-Seize	34517	8 oz.	26
N-7000 Metal Free Anti-Seize	51270	1 lb.	26	Penetrating Oil	80032	1 pt.	24	Superflex® Red High Temp RTV Silicone Adhesive Sealant	82279	12 oz.	9	White High Temp Anti-Seize	34518	1 lb.	26
N-7000 Metal Free Anti-Seize	51272	8 oz.	26	Peristaltic Hand Pump	97001		38	Superflex® White RTV Silicone Adhesive Sealant	59430	80 ml	8	White Lithium Grease	30530	1.5 oz.	24
N-7000 Metal Free Anti-Seize	51273	2 lb.	26	Pipe Joint Compound	30556	.25 pt.	6	Superflex® White RTV Silicone Adhesive Sealant	59475	300 ml	8	White Lithium Grease	30543	10.75 oz. aerosol	24
Natural Blue® Cleaner & Degreaser	82244	4 fl. oz.	31	Pipe Joint Compound	30557	1 pt.	6	Superflex® White RTV Silicone Adhesive Sealant	82518	7.25 oz.	8	Zinc Anti-Seize	39901	1 lb.	27
Natural Blue® Cleaner & Degreaser	82249	24 fl. oz.	31	Pipe Repair Kit, 2" x 6' Tape	96321		37	Thinner for Color Guard® Tough Rubber Coating	34995	1 gal.	28	Thread Sealant 545 Hydraulic/Pneumatic	32429	10 ml	7
Natural Blue® Cleaner & Degreaser	82251	1 gal.	31	Pipe Repair Kit, 4" x 12' Tape	96322		37	Thread Sealant 545 Hydraulic/Pneumatic Sealant	54531	50 ml	7	Thread Sealant 545 Hydraulic/Pneumatic Sealant	54541	250 ml	7
Natural Blue® Cleaner & Degreaser	82253	5 gal.	31	Primer for Color Guard® Tough Rubber Coating	34994	1 gal.	28	Thread Sealant 545 Hydraulic/Pneumatic Sealant	54541	250 ml	7	Thread Sealant 564 Lower Strength	28753	6 ml	6
Natural Blue® Cleaner & Degreaser	82254	15 gal.	31	Primer N 7649 (Acetone)	21347	25 g	4, 6	Thread Sealant 564 Lower Strength	28754	50 ml	6	Thread Sealant 564 Lower Strength	28754	50 ml	6
Natural Blue® Cleaner & Degreaser	82255	55 gal.	31	Primer N 7649 (Acetone)	21348	4.5 oz.	4, 6	Thread Sealant 564 Lower Strength	28754	50 ml	6	Thread Sealant 564 Lower Strength	28754	50 ml	6
Nickel Anti-Seize	51102	1 lb.	26	Prism® 454 Surface Insensitive Instant Adhesive Gel	45404	3 g	35	Thread Sealant 564 Lower Strength	28754	50 ml	6	Thread Sealant 564 Lower Strength	28754	50 ml	6